



<b>Code</b>	<b>T150</b>
<b>Input Voltage</b>	<b>DC42 110MA</b>
<b>Power(Watts)</b>	<b>4W</b>
<b>Lumen</b>	<b>251.8lm</b>
<b>Lamp holder</b>	<b>Ceramic PCB</b>
<b>Light Source</b>	<b>Bridgelux 2835</b>
<b>Beam Angle</b>	<b>220°</b>
<b>Color Temperature</b>	<b>3000K</b>
<b>CRI ≥</b>	<b>80</b>
<b>IP level</b>	<b>IP20</b>
<b>Main Material</b>	<b>Brass</b>
<b>Wire connection way</b>	<b>Track Adaptor</b>
<b>Class</b>	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III
<b>Certificates</b>	<b>CE . ROHS</b>
<b>Dimmable</b>	<b>Optional</b>



## Optic Data

### Luminous Intensity Distribution Curve

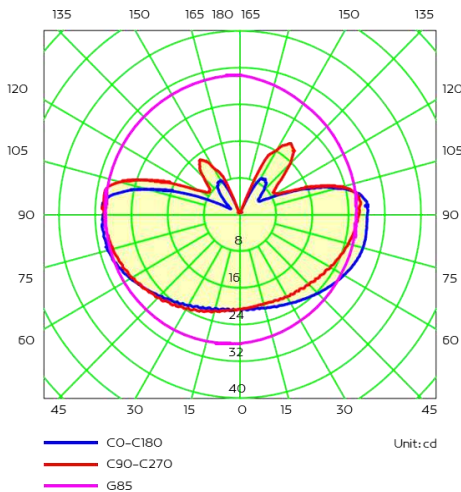

### AAI Figure

