


<b>Code</b>	T256 (WHT) / T257 (BLK)	
<b>Input Voltage</b>	DC48 500MA	
<b>Power(Watts)</b>	18W	
<b>Lumen</b>	898.6lm	
<b>Lamp holder</b>	Aluminum PCB	
<b>Light Source</b>	Bridgelux 2835	
<b>Beam Angle</b>	96°	
<b>Color Temperature</b>	3000K	
<b>CRI ≥</b>	80	
<b>IP level</b>	IP20	
<b>Main Material</b>	Aluminum	
<b>Body Color</b>	WHT / BLK	
<b>Wire connection way</b>	Track Adaptor	
<b>Class</b>	<input type="checkbox"/> I	<input type="checkbox"/> II
<b>Certificates</b>	CE . ROHS	




## Optic Data

### Luminous Intensity Distribution Curve

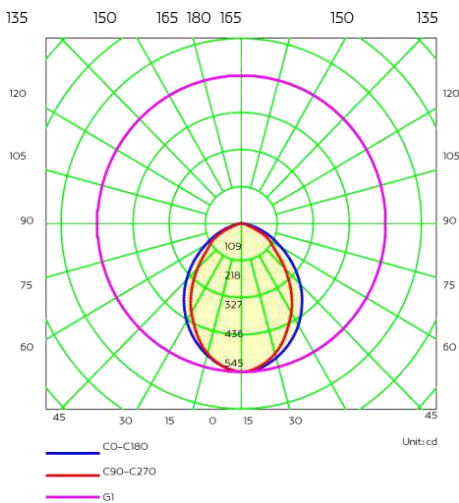

### AAI Figure

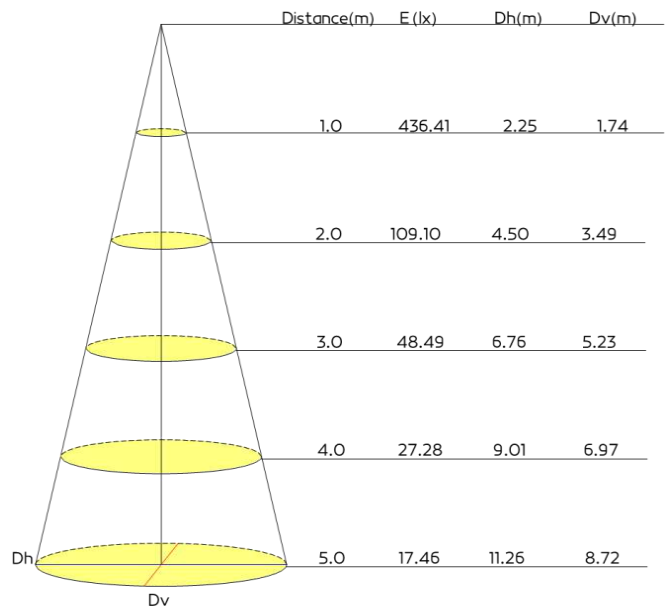

Beam Angle: H96.8 V82.1 Field Angle: H147.3 V136.8