

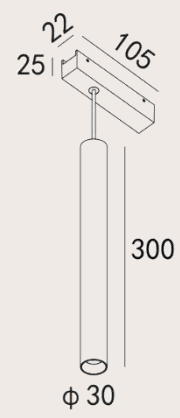


<b>Code</b>	<b>T352</b>
<b>Input Voltage</b>	<b>DC 48V</b>
<b>Power(Watts)</b>	<b>7W</b>
<b>Lumen</b>	<b>452lm</b>
<b>Beam Angle</b>	<b>Bridgelux BXKC</b>
<b>Light Source</b>	<b>36°</b>
<b>Color Temperature</b>	<b>3000K</b>
<b>CRI ≥</b>	<b>90</b>
<b>IP level</b>	<b>IP20</b>
<b>Main Material</b>	<b>Aluminum</b>
<b>Body Color</b>	<b>Black</b>
<b>Class</b>	<input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III

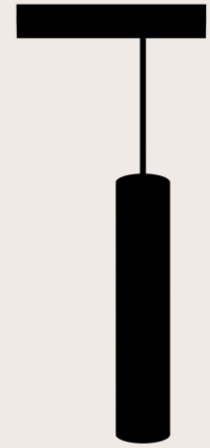

## Optic Data

### Luminous Intensity Distribution Curve

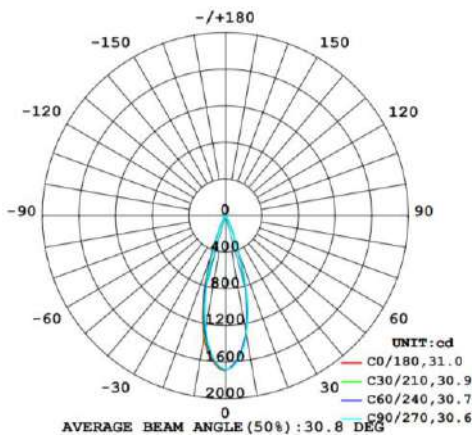

Flux out: 295.0 lm

Height	Eavg, Emax	Angle: 30.45deg	Diameter
1m	1142, 1689lx		54.44cm
2m	285.5, 422.4lx		108.88cm
3m	126.9, 187.7lx		163.32cm
4m	71.39, 105.6lx		217.77cm
5m	45.69, 67.58lx		272.21cm
6m	31.73, 46.93lx		326.65cm
7m	23.31, 34.48lx		381.09cm
8m	17.85, 26.40lx		435.53cm
9m	14.10, 20.86lx		489.97cm
10m	11.42, 16.89lx		544.42cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.