

Code	XB2RKBO635
Consumption(W)	8.7W
Light source	6 × 1.3W Osram
Color Temperature	3000K
Lumen	567lm
Beam Angle	20°
IP rating	67
IK rating	07
Input Voltage	220-240V
Housing	Extruded aluminum, powder coated
Front cover	Hard chrome-plated stainless steel SUS 316L
Light window	Tempered glass.T=6mm





Sleeve (Included)







314



325



ANGLE ADJUSTABLE

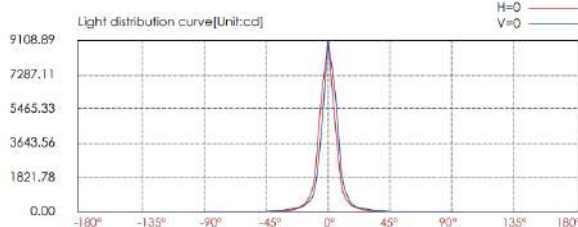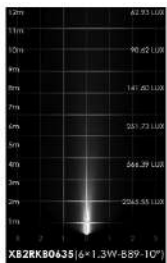

Lux distance curve

Center beam LUX	Beam width V	H
2265.55 LUX	0.4m	0.4m
566.39 LUX	0.8m	0.8m
251.73 LUX	1.2m	1.2m
141.60 LUX	1.6m	1.6m
93.62 LUX	2.0m	2.0m
62.93 LUX	2.4m	2.4m

Ver.Spread: 11.4 Horiz.Spread: 11.2