
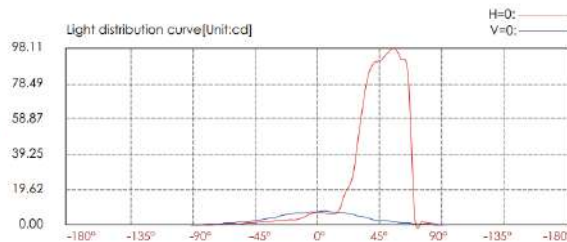








<b>Code</b>	<b>B1QR0102</b>
<b>Power (Watts)</b>	<b>1×3W</b>
<b>Color Temperature</b>	<b>3000K</b>
<b>Lumen</b>	<b>Black=46 White=81</b>
<b>Beam Angle</b>	<b>80°</b>
<b>IP rating</b>	<b>65</b>
<b>IK rating</b>	<b>10</b>
<b>Input Voltage</b>	<b>100-240V</b>
<b>Main Material</b>	<b>Die-Cast Aluminum</b>
<b>Body Color</b>	<b>Black/White</b>



Lux distance curve

Center beam LUX	Beam width V	H
2m 1.87 LUX	1.4m	1.4m
4m 0.47 LUX	2.7m	2.9m
6m 0.21 LUX	4.1m	4.3m
8m 0.12 LUX	5.5m	5.7m
10m 0.07 LUX	6.8m	7.1m
12m 0.05 LUX	8.2m	8.6m

Ver.Spread:37.8 Horiz.Spread:39.3