

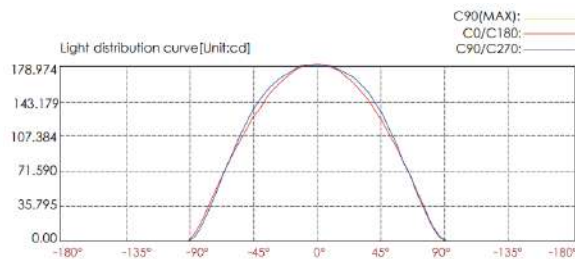




Code	D2HB10832
Consumption(W)	15W
Light source	108 × 0.14W Osram
Color Temperature	3000K
Lumen	525lm
Beam Angle	120°
IP rating	67
IK rating	07
Input Voltage	220-240V
Housing	Extruded aluminum anodize finishing
Light window	Tempered glass.T=6mm



SLEEVE (Included)

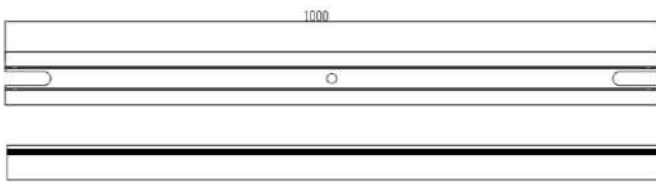

Lux distance curve

	Illuminance at a distance		Beam width	
	Center beam LUX	Beam width	V	H
2m	44.74 LUX	0.4m	6.5m	
4m	11.19 LUX	12.7m	13.0m	
6m	4.97 LUX	19.1m	19.6m	
8m	2.80 LUX	25.4m	26.1m	
10m	1.79 LUX	31.8m	32.6m	
12m	1.24 LUX	38.2m	39.1m	

Ver.Spread:115.7 Horiz.Spread:117.0