




نوران


NOORAN

MICRO TRACK DATASHEET


SEP - 2025

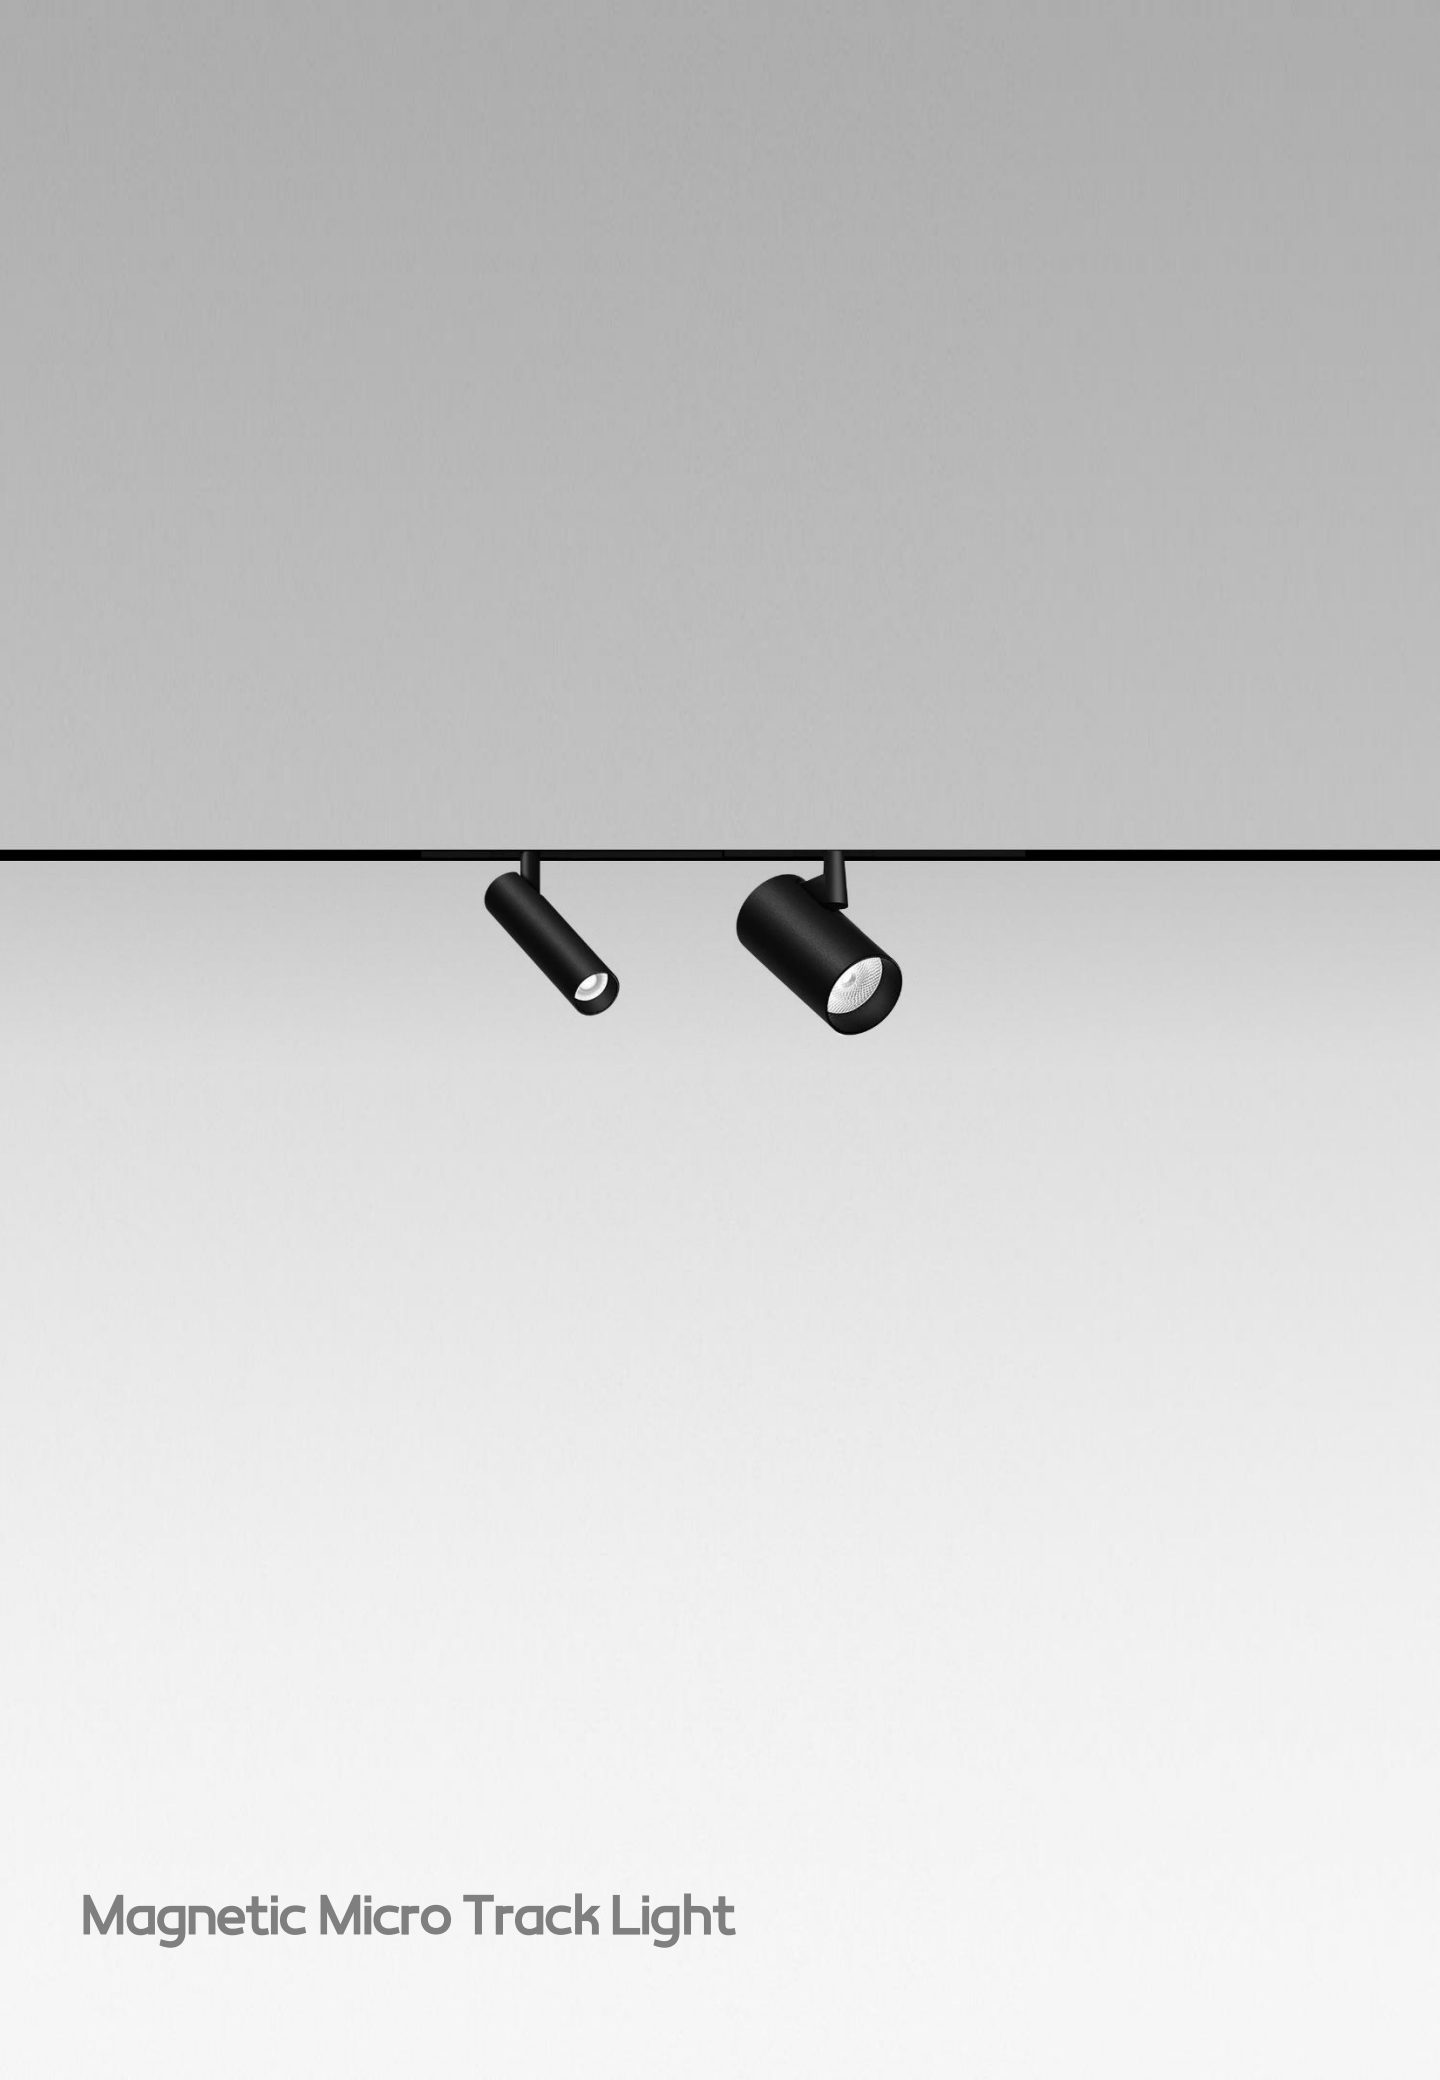


Magnetic Micro Track Light

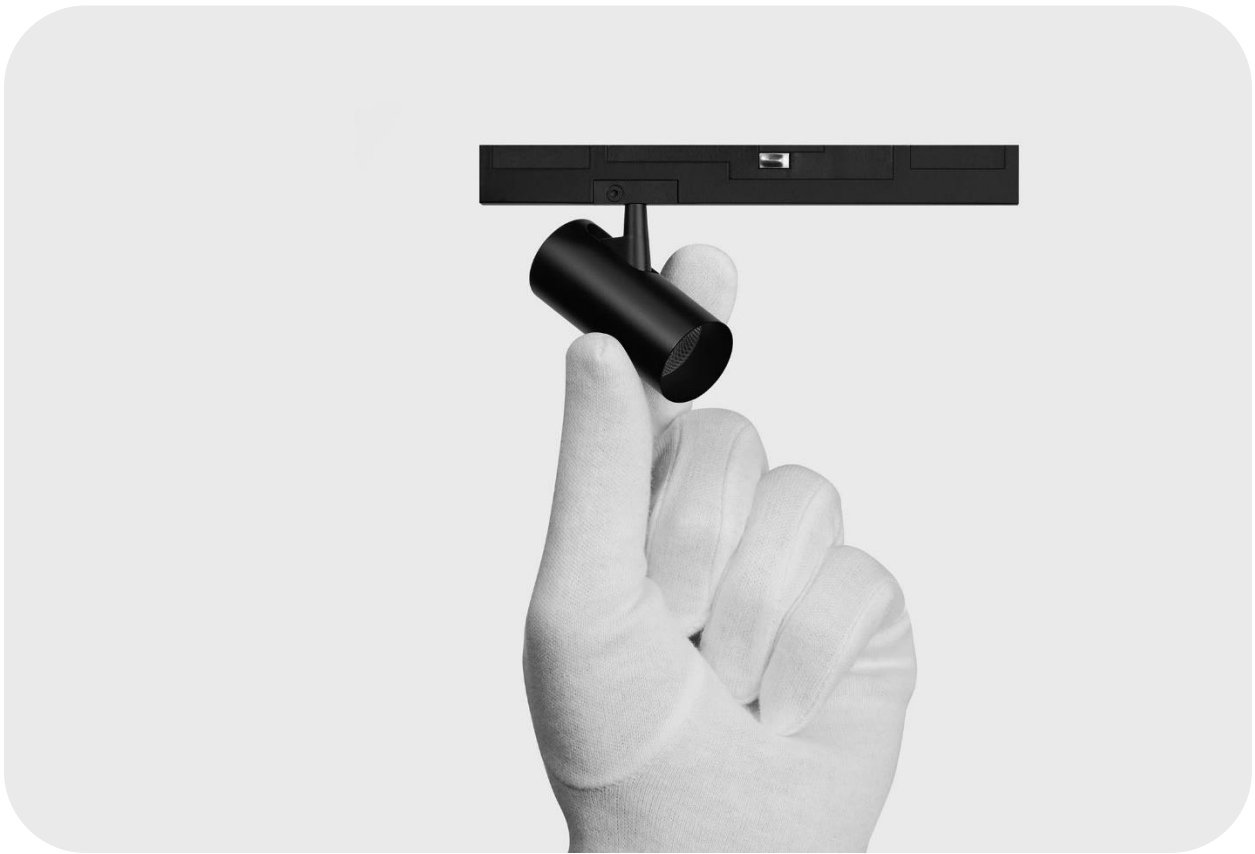


Magnetic Micro Track Light

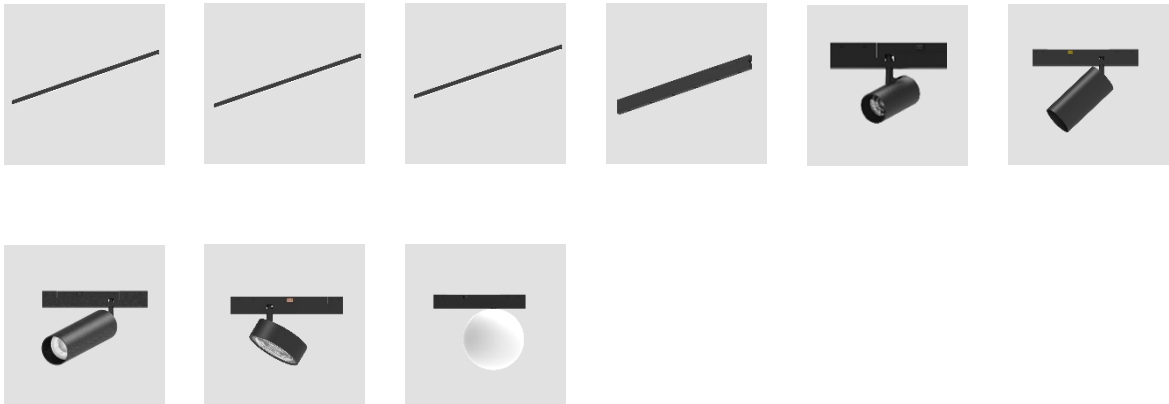


Micro Surface Tracks:

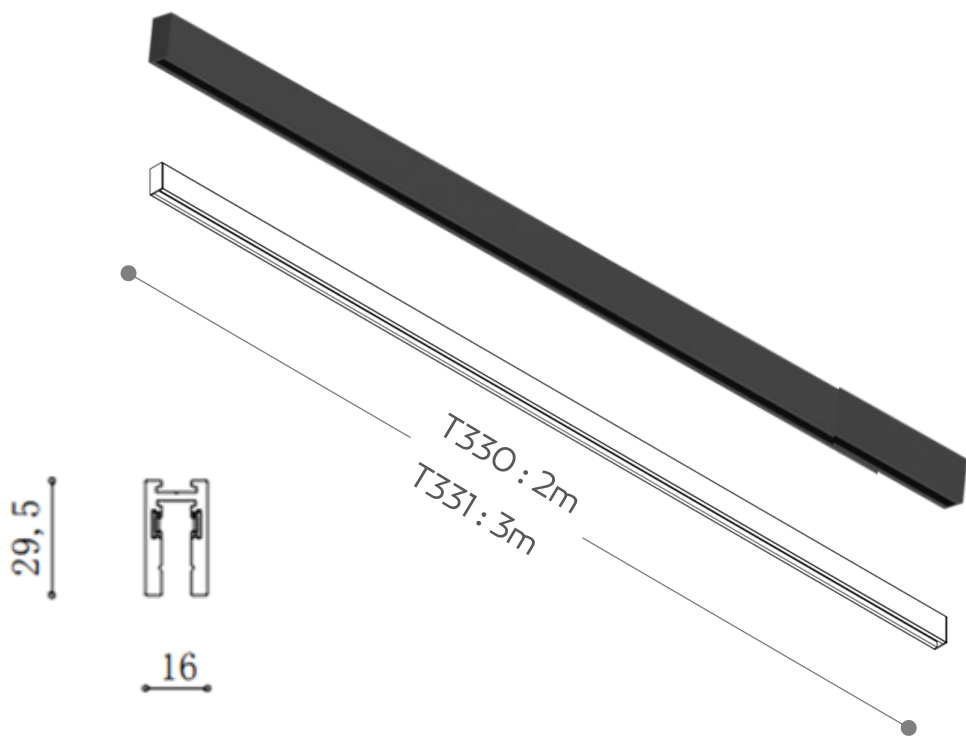


Micro Surface Track Installation:

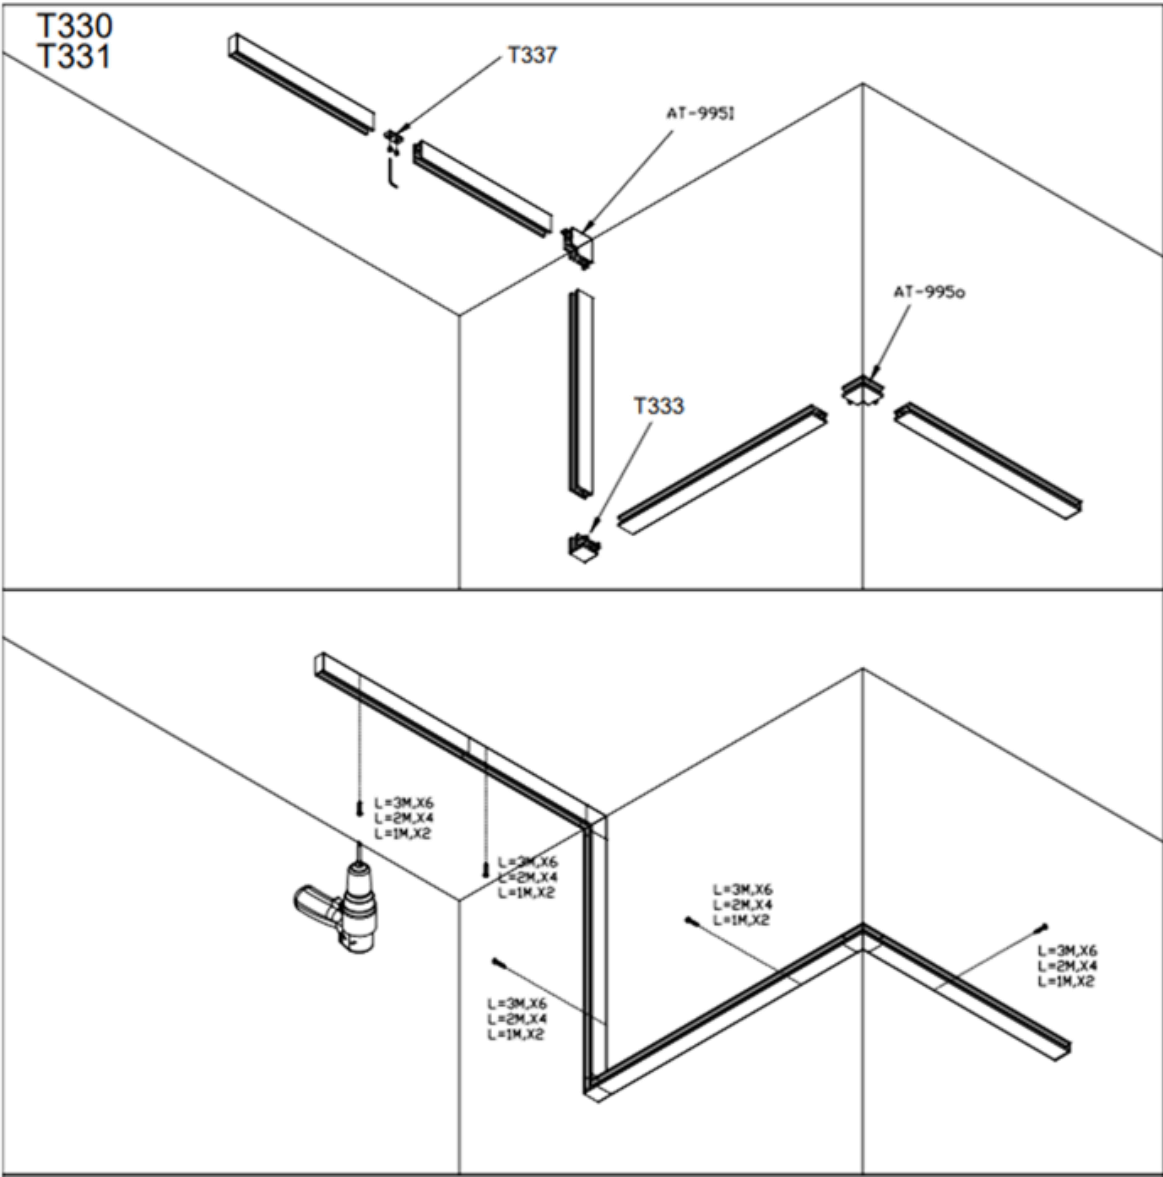













Micro Recessed Tracks:

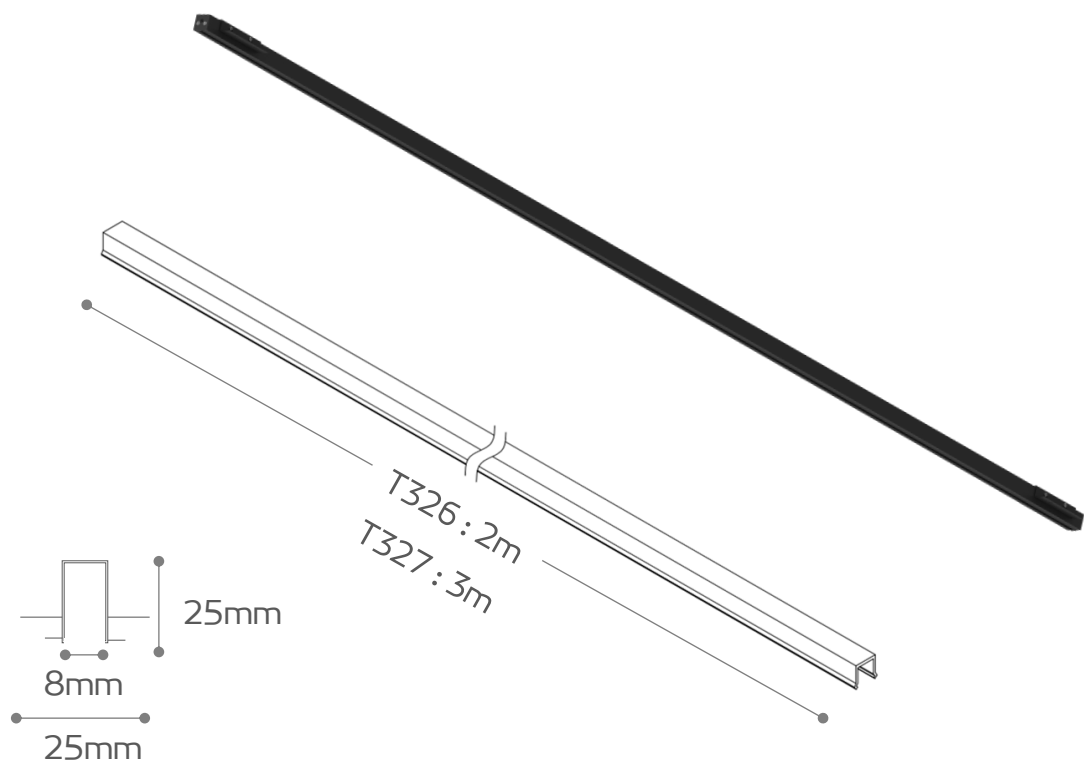



Micro Recessed Track Installation:

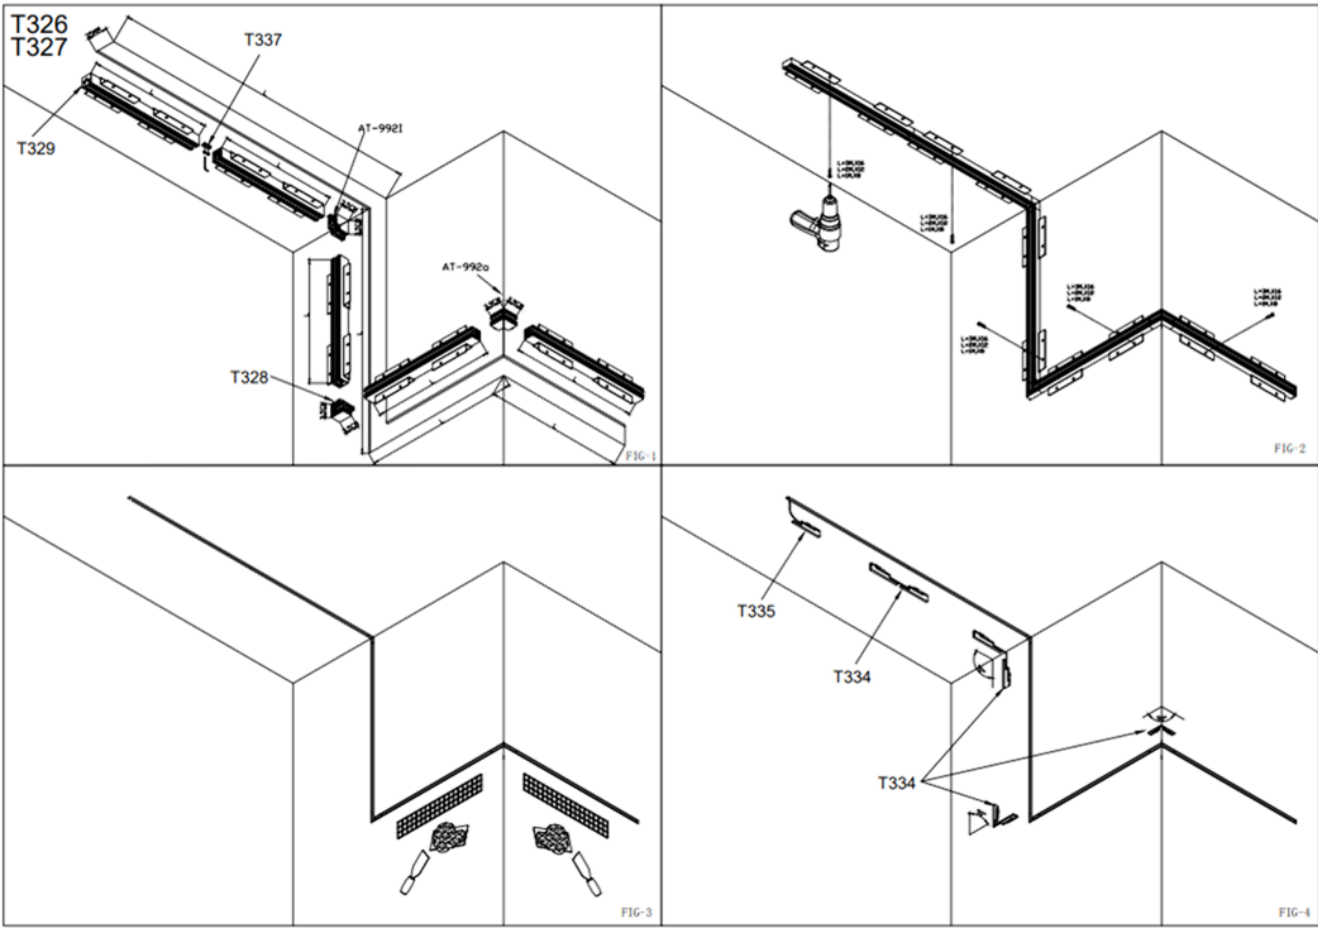



Micro Track Parts:

	Description	Line Drawing	Item Code	Dimension(mm)	Color
	Micro Recessed Track, L corner		T328	35x26x26	Black
	Micro Surface Track, L corner		T333	26x26x29.5	Black
	End cap for recessed track		T329	26x26	Black
	End cap for surface track		T332	16x10x29.5	Black
	Electricity connector		T334	112x7x23	Black
	Electricity Live in		T335	112x7x23	Black
	Connection part of tracks		T337	9.2x19x4	Black
	Track cover 2m		T336	2000X8.5X7.9	Black

Code	T338
Input Voltage	DC48
Power(Watts)	10W
Lumen	439lm
Lamp holder	Flexible Lamp Belt
Light Source	Bridgelux 2835
Beam Angle	120°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Wire connection way	Terminal block
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS

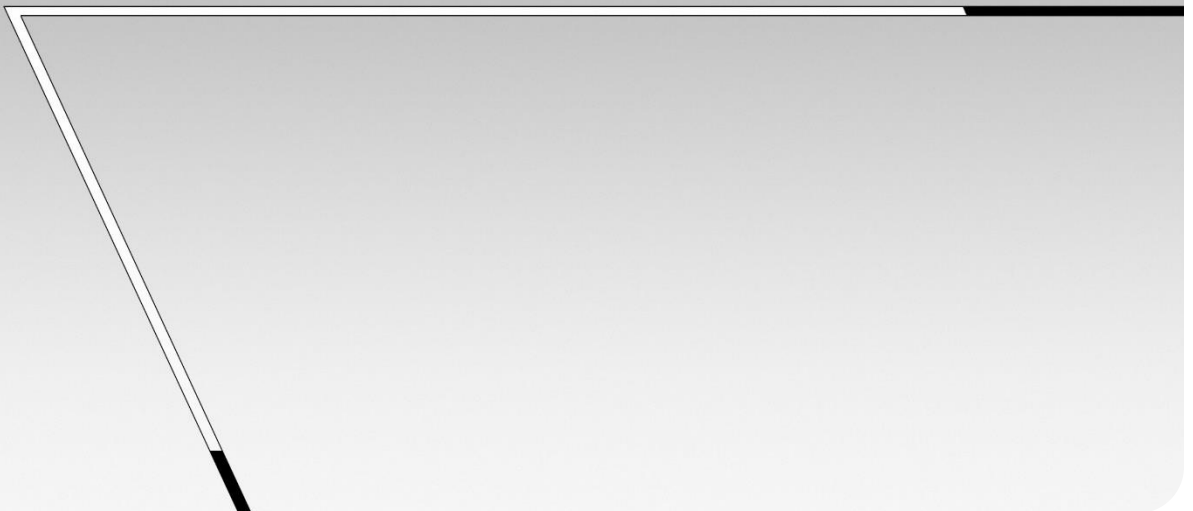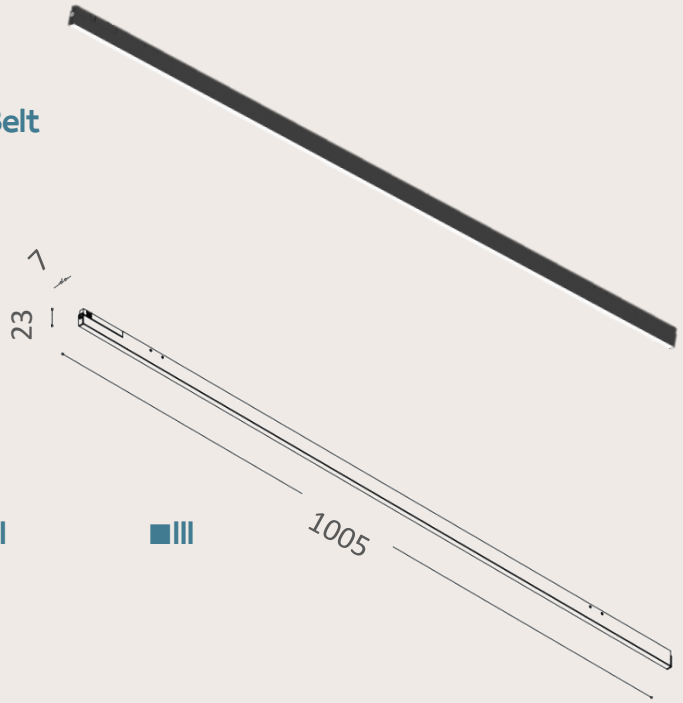

Code	T339
Input Voltage	DC48
Power(Watts)	20W
Lumen	880lm
Lamp holder	Flexible Lamp Belt
Light Source	Bridgelux 2835
Beam Angle	120°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Wire connection way	Terminal block
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS

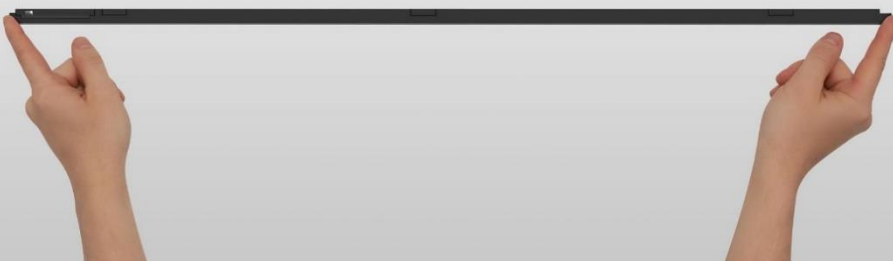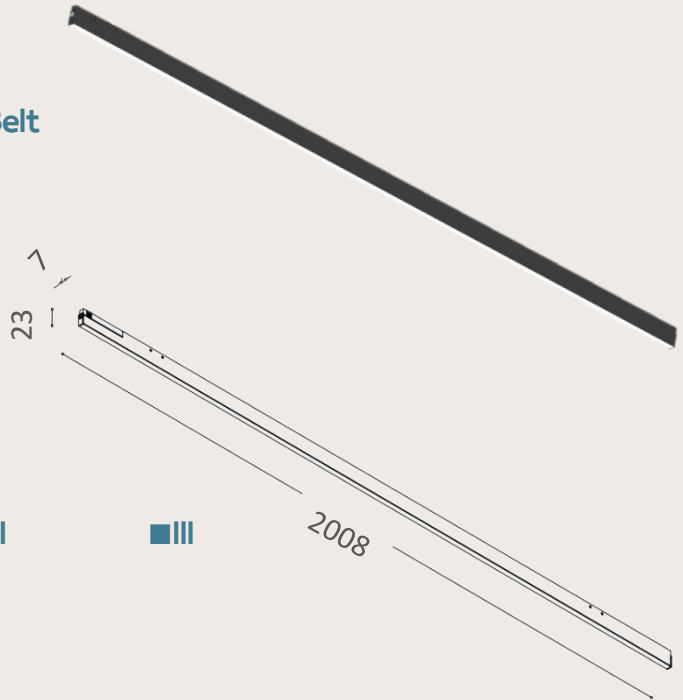

Code T346 (Wallwasher)

Input Voltage DC48

Power(Watts) 12W

Lumen 321.7lm

Lamp holder Flexible Lamp Belt

Light Source Bridgelux 2835

Beam Angle 124.4°

Color Temperature 3000K

CRI ≥ 90


IP level IP20

Main Material Aluminum



Wire connection way Terminal block

Class ☐ I ☐ II ☒ III


Certificates CE , ROHS

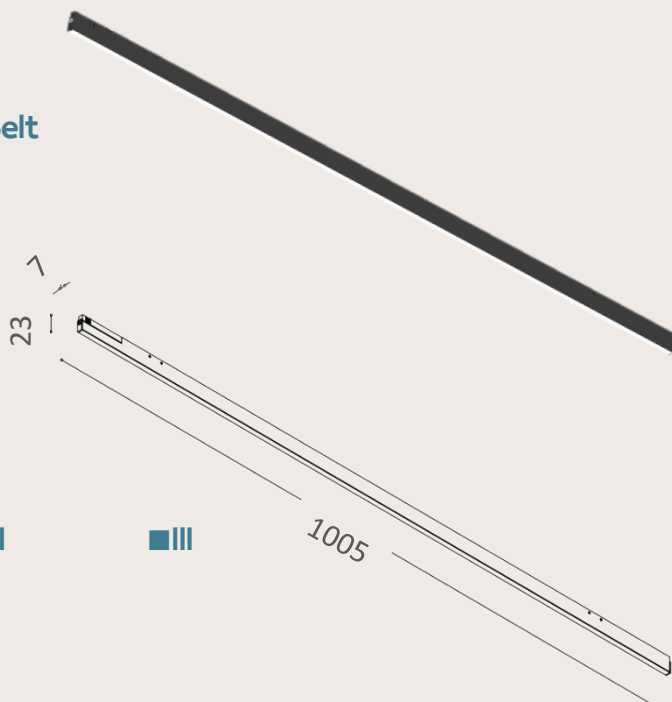


Code	T382
Input Voltage	DC48
Power(Watts)	4W
Lumen	258lm
Lamp holder	Flexible Lamp Belt
Light Source	CREE 3030
Beam Angle	75°
Color Temperature	3000K
CRI ≥	90
IP level	IP20
Main Material	Aluminum
Wire connection way	Terminal block
Class	☐ I ☐ II
Certificates	CE , ROHS

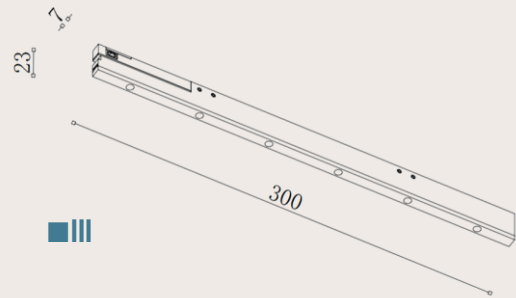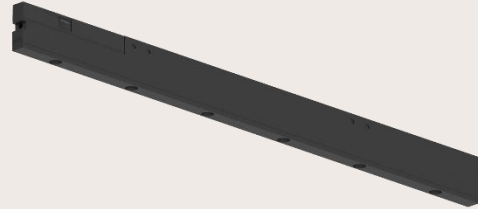

Code	T340
Input Voltage	DC48
Power(Watts)	4.5W
Lumen	416lm
Lamp holder	Flexible Lamp Belt
Light Source	CREE CXAI304
Beam Angle	36°
Color Temperature	3000K
CRI ≥	90
IP level	IP20
Main Material	Aluminum
Wire connection way	Terminal block
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS

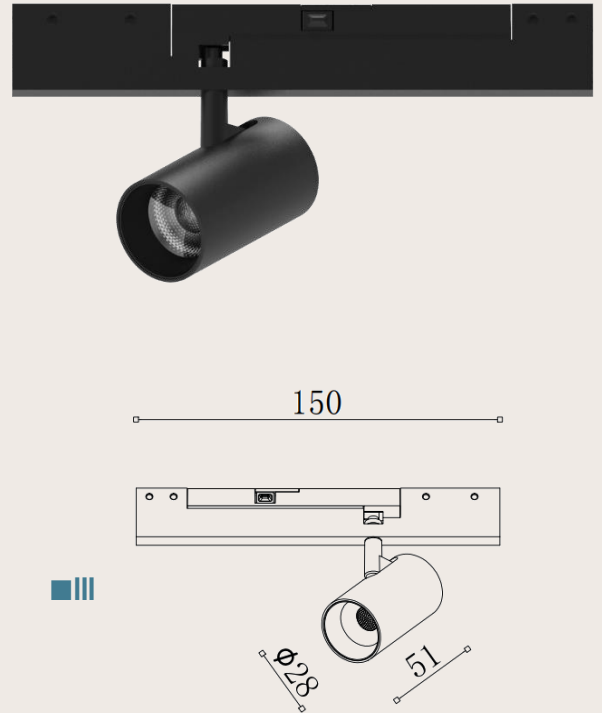


Code	T344
Input Voltage	DC48
Power(Watts)	13W
Lamp holder	Flexible Lamp Belt
Light Source	CREE CXB1512
Beam Angle	30°
Color Temperature	3000K
CRI ≥	90
IP level	IP20
Main Material	Aluminum
Wire connection way	Terminal block
Class	□I □II ■III
Certificates	CE , ROHS




Code	T381
Input Voltage	DC48
Power(Watts)	18W
Lamp holder	Flexible Lamp Belt
Light Source	CREE CXB1512
Beam Angle	30°
Color Temperature	3000K
CRI ≥	90
IP level	IP20
Main Material	Aluminum
Wire connection way	Terminal block
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS






150



Code	T341
Input Voltage	DC48
Power(Watts)	7W
Lumen	583lm
Lamp holder	Aluminum PCB
Light Source	CREE CXAI304
Beam Angle	38°
Color Temperature	3000K
CRI ≥	90
IP level	IP20
Main Material	Aluminum
Wire connection way	Terminal block
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS

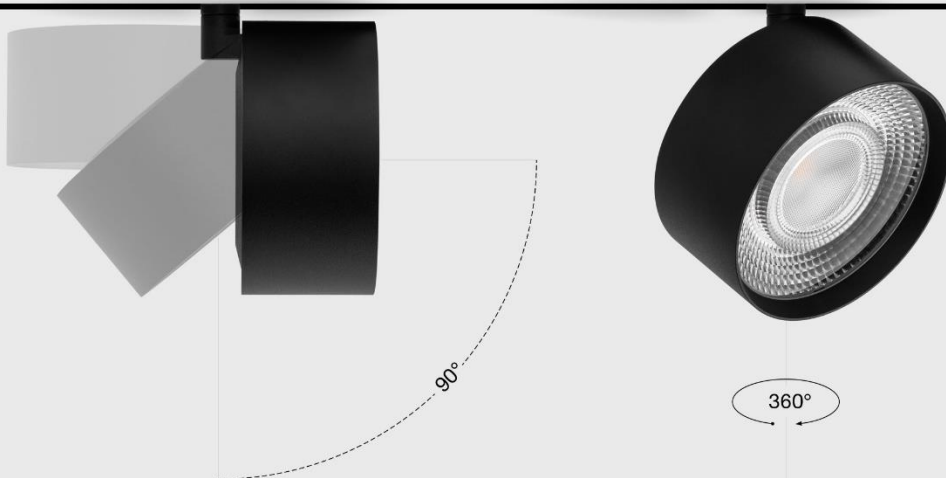

Code	T343
Input Voltage	DC48
Power(Watts)	4W
Lumen	247lm
Lamp holder	Flexible Lamp Belt
Light Source	Bridgelux 2835
Beam Angle	220°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Aluminum
Wire connection way	Terminal block
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS

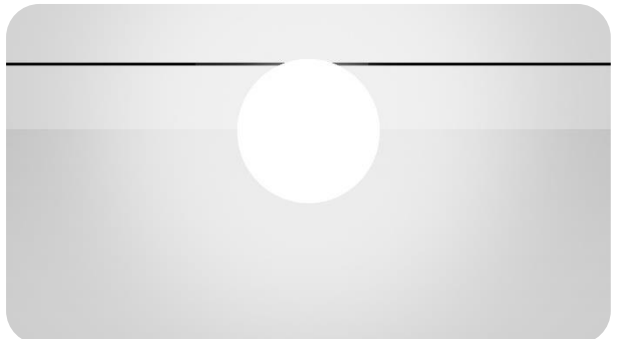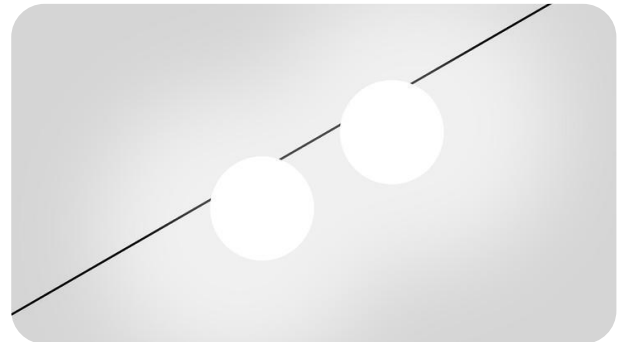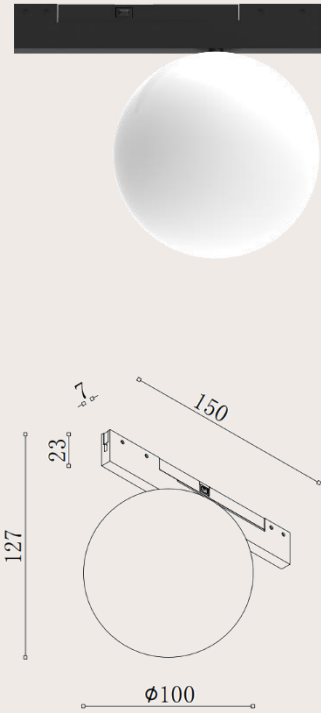

Magnetic Micro Track Light





نوران
NOORAN