



نوران  

---

NOORAN

MULTI TRACK DATASHEET

SEP - 2025

Magnetic Multi Track Light





Magnetic Multi Track Light



# Description of Accessories

## Round Profile ►

|  | Diameter | Code No. | Color |
|-----------------------------------------------------------------------------------|----------|----------|-------|
|                                                                                   | 2m       | T192     | White |
|                                                                                   |          | T193     | Black |
|                                                                                   | 3m       | T194     | White |
|                                                                                   |          | T195     | Black |

## Track Installation Connectors & Accessories ►



T173 (BLK) – 600mm cable  
T202 (WHT) – 600mm cable  
T168 (BLK) – 1500mm cable



T176 (BLK)  
T203 (WHT)









T300 (BLK)  
T301 WHT)





T167 (T127)

# Installation exploded view

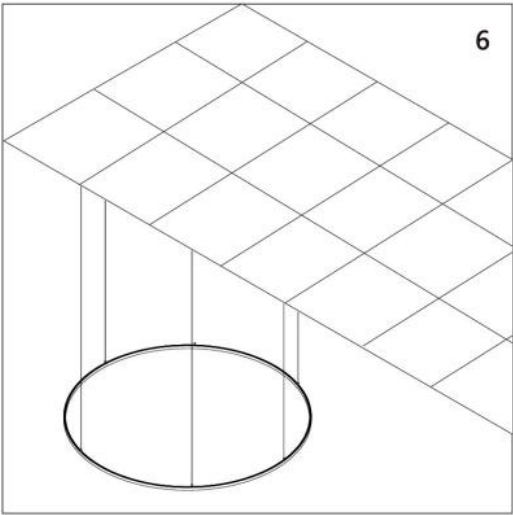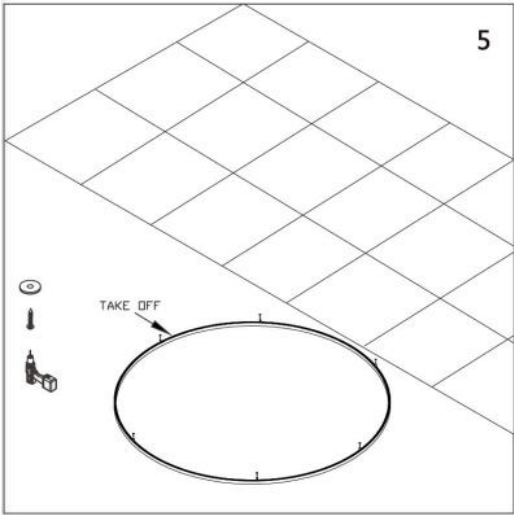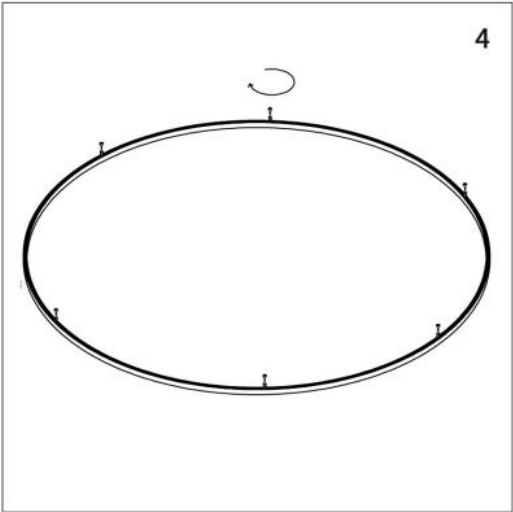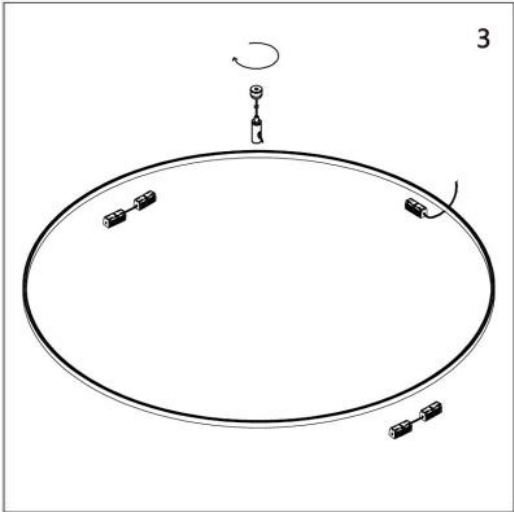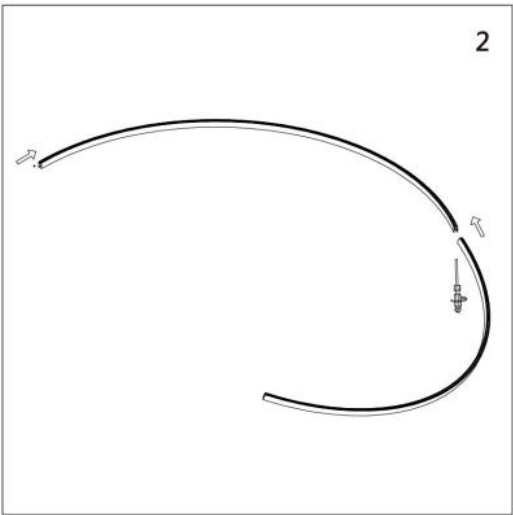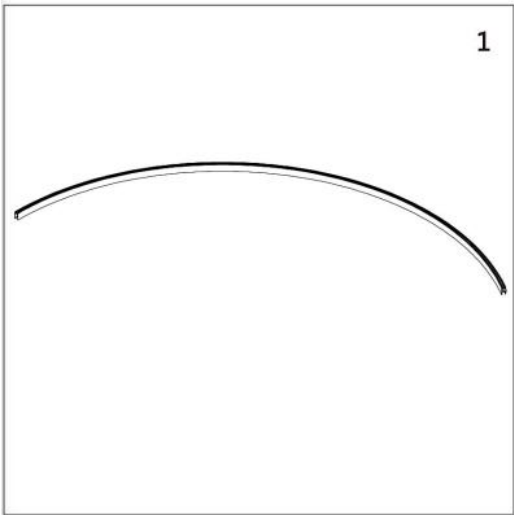

# Description of Accessories

## Surface Track ▶

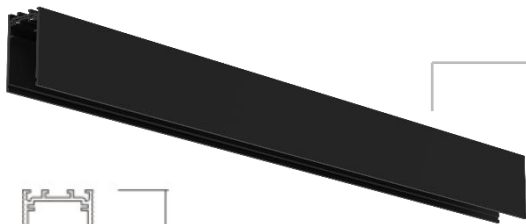

| Diameter | Code | Color              |
|----------|------|--------------------|
| 600mm    | T126 | Black              |
| 2000mm   | T315 | Anodized dark gray |

## Track Installation Connectors & Accessories



T173 (BLK) – 600mm cable  
T202 (WHT) – 600mm cable  
T168 (BLK) – 1500mm cable



T176 (BLK)  
T203 (WHT)



T300 (BLK)  
T301 WHT)



T165 (BLK)  
T199 (WHT)



T166 (BLK)



T128 (BLK)



T167/T127) (Silver)  
T347 (BLK)



T172 (BLK)  
T201 (WHT)



| Diameter | Code No. | Color |
|----------|----------|-------|
| 2000mm   | T170     | Black |
|          | T200     | White |
| 3000mm   | T171     | Black |
|          | T371     | White |



T183 (BLK)  
T273 (WHT)







T184 (BLK)  
T204 (WHT)




T185 (BLK)

# Installation of Surface Track
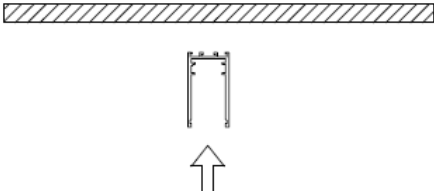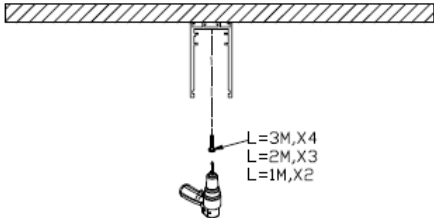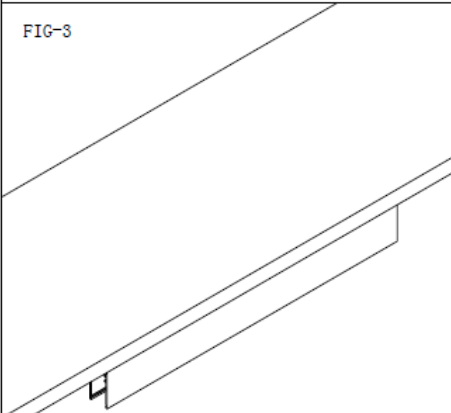
|                                                                                                                                                 |                                                                                                                |                                                                                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <div>T161<br/>T162<br/>T198<br/>T207<br/>T208</div> <div></div> | <div>FIG-1</div> <div></div> | <div>FIG-2</div> <div></div> |
| <div>FIG-3</div> <div></div>                                  |                                                                                                                |                                                                                                                 |

# Description of Accessories

## Recessed Track ▶



| Diameter | Code No. | Color |
|----------|----------|-------|
| 2000mm   | T158     | Black |
| 3000mm   | T206     | Black |

## Track Installation Connectors & Accessories



T173 (BLK) – 600mm cable  
T202 (WHT) – 600mm cable



T176 (BLK)  
T203 (WHT)



T300 (BLK)  
T301 (WHT)



T159 (BLK)  
T197 (WHT)



T160 (BLK)








T172 (BLK)  
T201 (WHT)




| Diameter | Code No. | Color |
|----------|----------|-------|
| 2000mm   | T170     | Black |
|          | T200     | White |
| 3000mm   | T171     | Black |
|          | T371     | White |

# Installation of Recessed Track
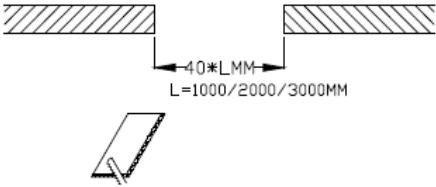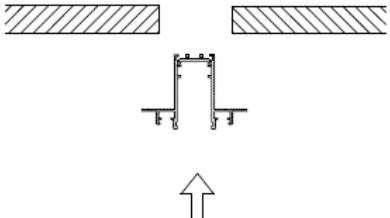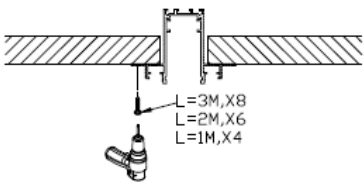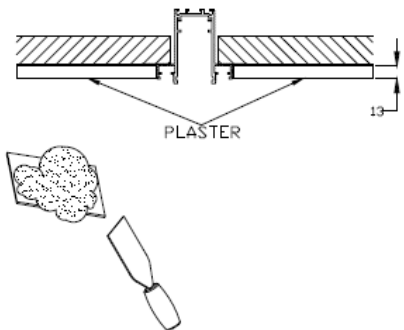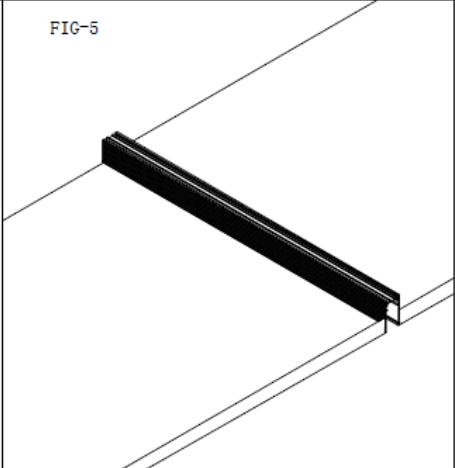
|                                                                                                                                                 |                                                                                                                 |                                                                                                                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <div>T157<br/>T158<br/>T196<br/>T205<br/>T206</div> <div></div> | <div>FIG-1</div> <div></div>   | <div>FIG-2</div> <div></div>  |
| <div>FIG-3</div> <div></div>                                  | <div>FIG-4</div> <div></div> | <div>FIG-5</div> <div></div> |

# Description of Accessories

## Recessed Track ▶

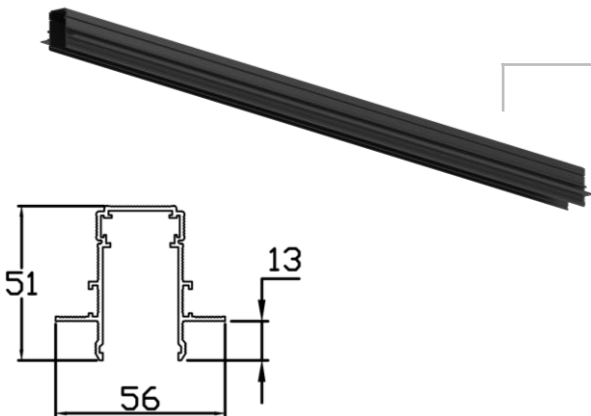

| Diameter | Code No. | Color |
|----------|----------|-------|
| 2000mm   | T306     | Black |
|          | T316     | White |
| 3000mm   | T307     | Black |
|          | T317     | White |

## Track Installation Connectors & Accessories



T173 (BLK) – 600mm cable  
T202 (WHT) – 600mm cable



T176 (BLK)  
T203 (WHT)



T300 (BLK)  
T301 (WHT)



T308 (BLK)  
T318 (WHT)




T309 (BLK)  
T319 (WHT)




| Diameter | Code No. | Color |
|----------|----------|-------|
| 2000mm   | T170     | Black |
|          | T200     | White |
| 3000mm   | T171     | Black |
|          | T371     | White |

# Installation of Recessed Track

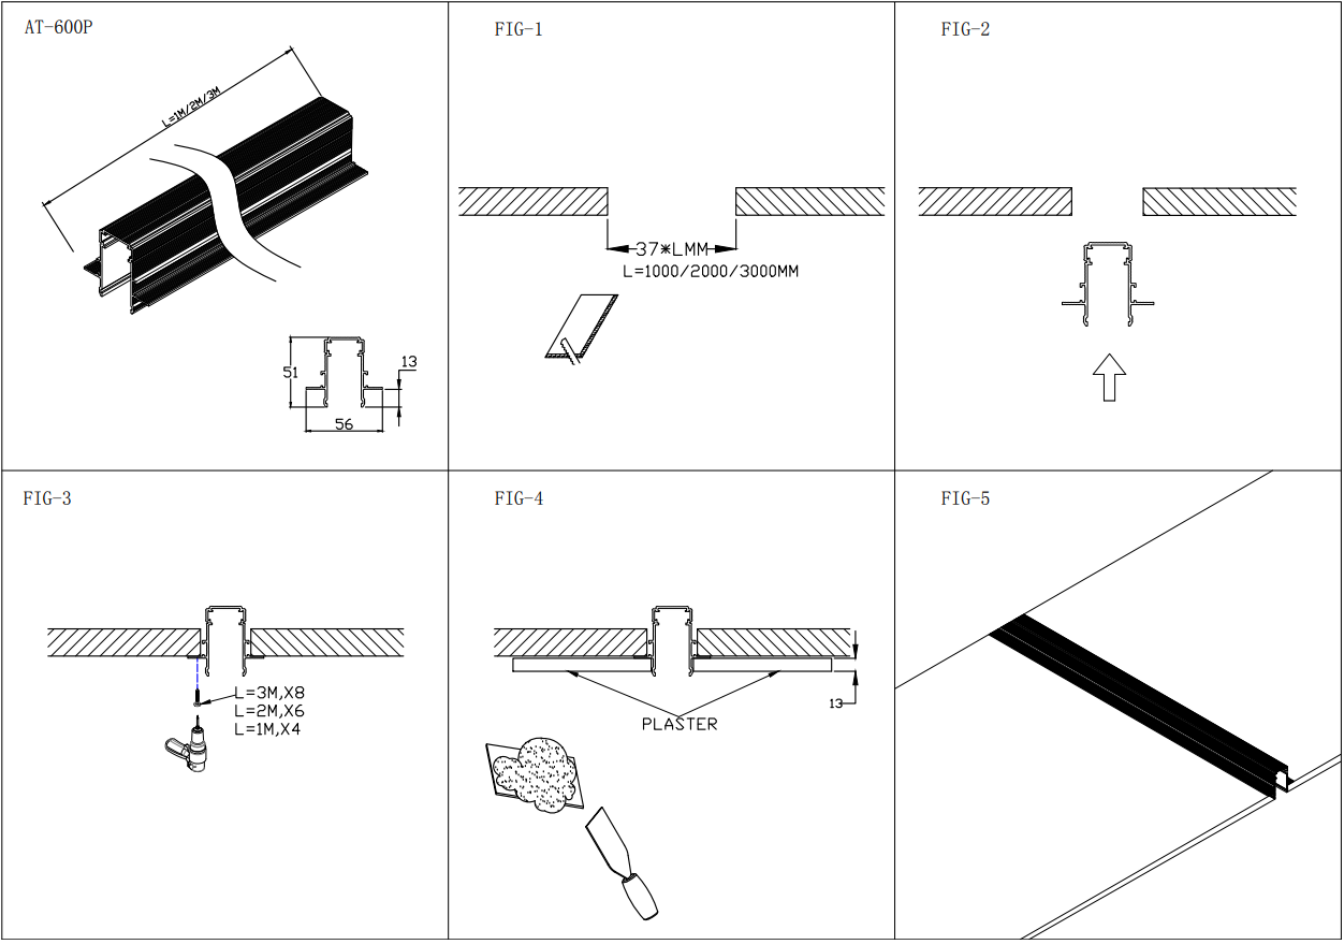


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T246 (WHT) / T180 (WHT)                                                                        |
| Input Voltage       | DC48 350MA                                                                                     |
| Power(Watts)        | 8W . 6.7W                                                                                      |
| Lumen               | 470lm. 522lm                                                                                   |
| Lamp holder         | Ceramic PCB                                                                                    |
| Light Source        | CREE CXA 1304                                                                                  |
| Beam Angle          | 70° . 50°                                                                                      |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT                                                                                            |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |

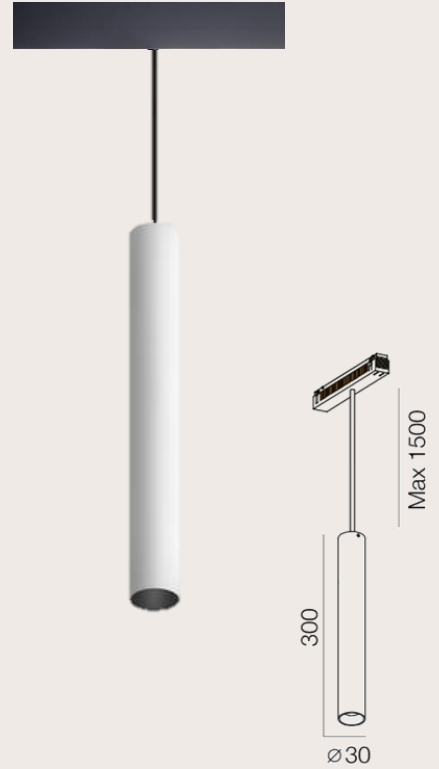


## Optic Data


### Luminous Intensity Distribution Curve

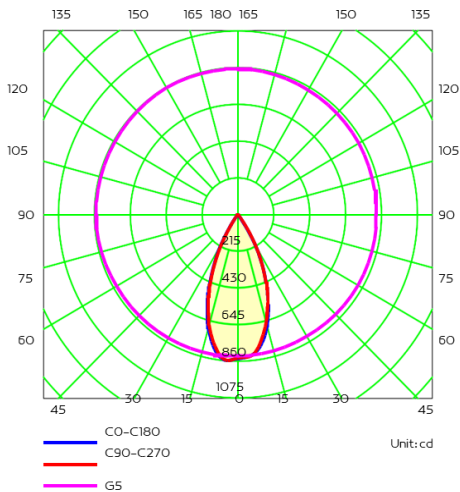

### AAI Figure

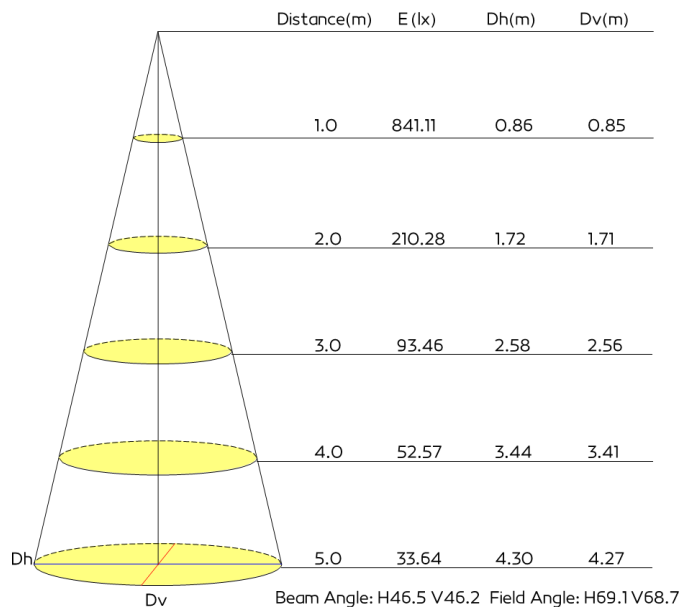


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T254 (WHT)                                                                                     |
| Input Voltage       | DC48                                                                                           |
| Power(Watts)        | 28W                                                                                            |
| Lumen               | 2182lm                                                                                         |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | CREE 3030                                                                                      |
| Beam Angle          | 101°                                                                                           |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT                                                                                            |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |

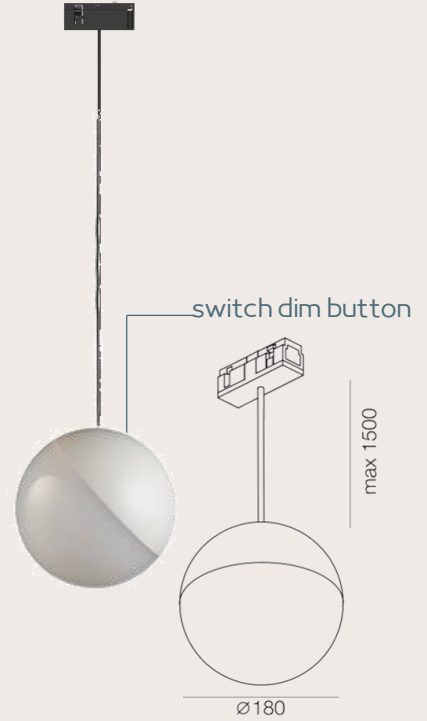


## Optic Data

### Luminous Intensity Distribution Curve

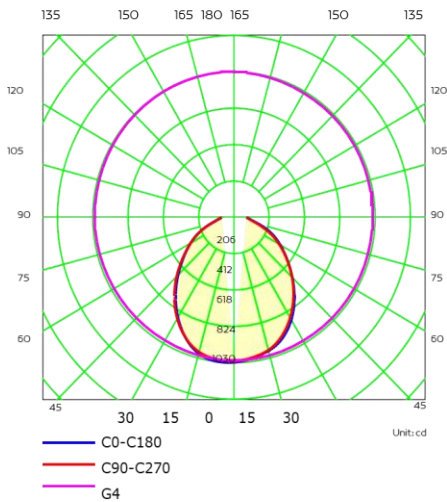

### AAI Figure

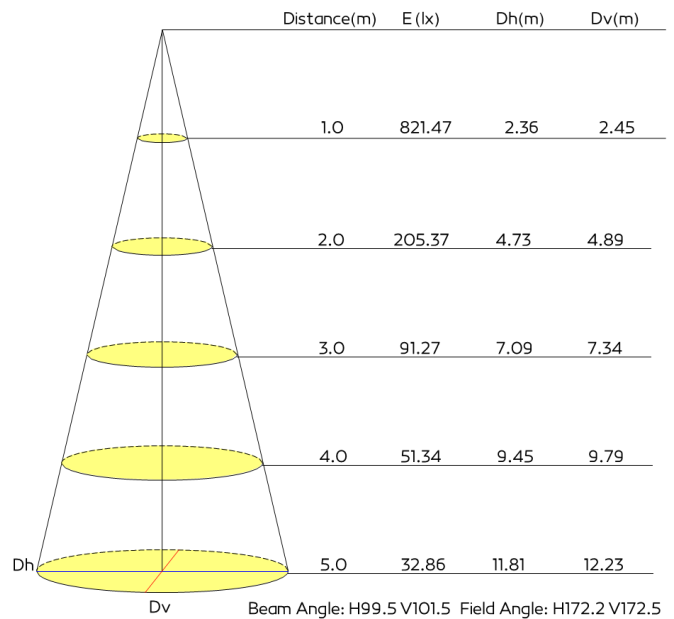


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T321(BLK)                                                                                      |
| Input Voltage       | DC48                                                                                           |
| Power(Watts)        | 13W                                                                                            |
| Lumen               | 2087lm                                                                                         |
| Lamp holder         | Ceramic PCB                                                                                    |
| Light Source        | CREE CXA1512(18V)                                                                              |
| Beam Angle          | 30°                                                                                            |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 90                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | BLK                                                                                            |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |




## Optic Data


### Luminous Intensity Distribution Curve

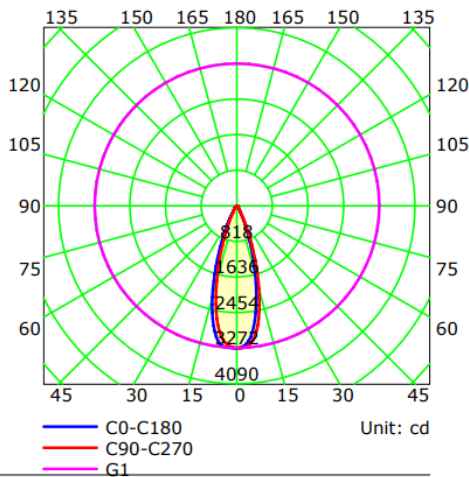

### AAI Figure

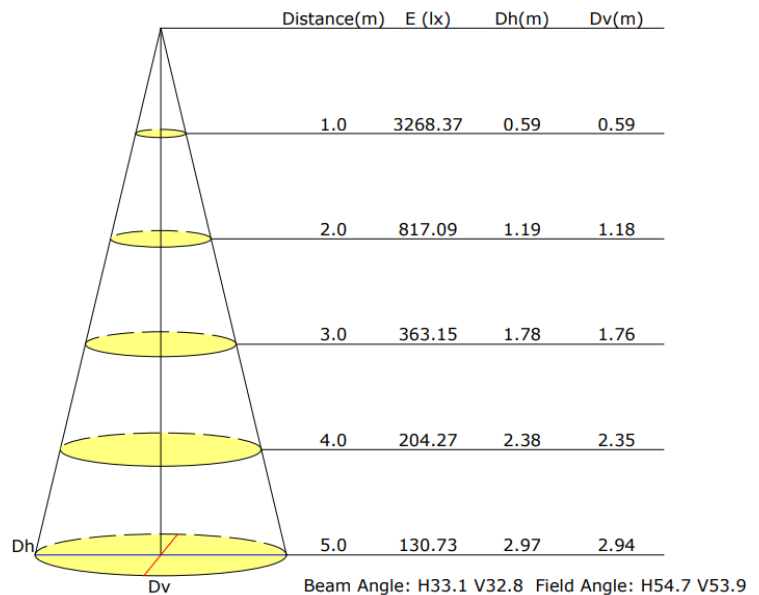


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T190(BLK)                                                                                      |
| Input Voltage       | DC48                                                                                           |
| Power(Watts)        | 13W                                                                                            |
| Lumen               | 2513lm                                                                                         |
| Lamp holder         | Ceramic PCB                                                                                    |
| Light Source        | CREE CXA1512(37V)                                                                              |
| Beam Angle          | 38°                                                                                            |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 90                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | BLK                                                                                            |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |

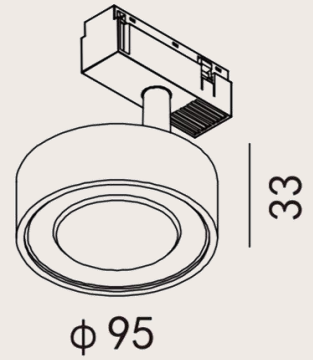


## Optic Data

### Luminous Intensity Distribution Curve

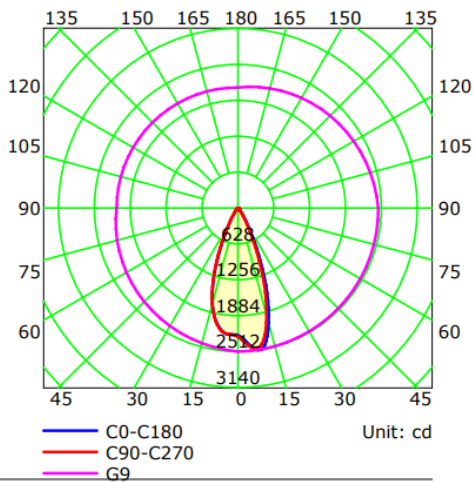


Test Device: GPM-1800  
Distance: 10.096 m  
Humidity: 71  
Inspector:

### AAI Figure

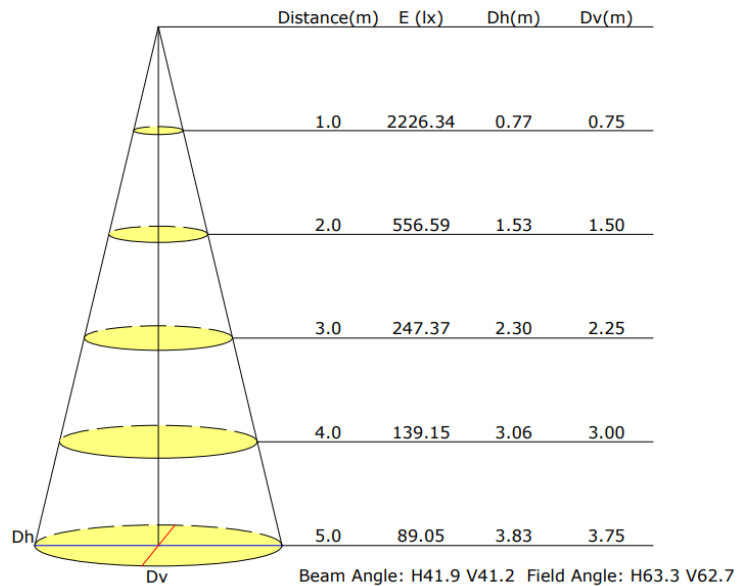


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T380 (WHT) / T311 (Dark Gray) / T312 (Nickel)                                                  |
| Input Voltage       | DC48 700MA                                                                                     |
| Power(Watts)        | 6.7W                                                                                           |
| Lumen               | 657lm                                                                                          |
| Lamp holder         | Ceramic PCB                                                                                    |
| Light Source        | Bridgelux C6                                                                                   |
| Beam Angle          | 30°                                                                                            |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |




## Optic Data


### Luminous Intensity Distribution Curve

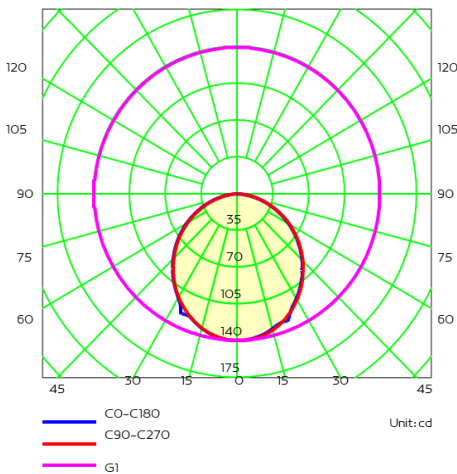

### AAI Figure

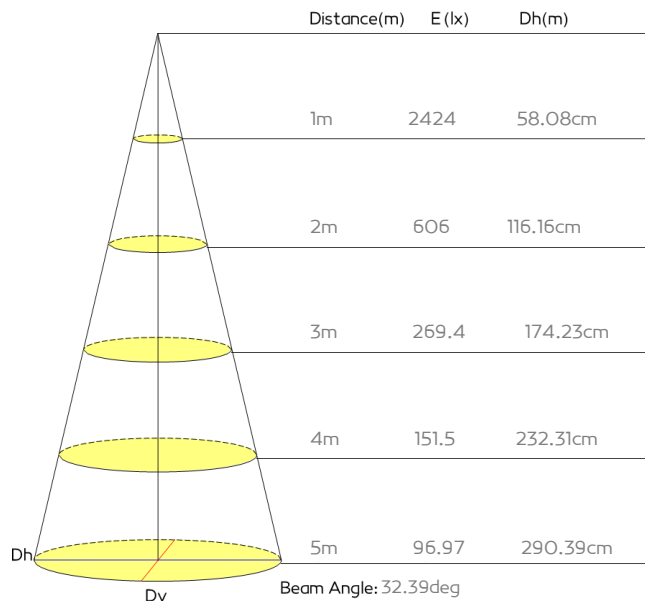


|                     |                                                                                                |  |  |
|---------------------|------------------------------------------------------------------------------------------------|--|--|
| Code                | T232 (WHT) / T233 (BLK) / T322 (Dark gray) / T323 (Nickel)                                     |  |  |
| Input Voltage       | DC48 350MA                                                                                     |  |  |
| Power(Watts)        | 14W                                                                                            |  |  |
| Lumen               | 1446lm                                                                                         |  |  |
| Lamp holder         | Ceramic PCB                                                                                    |  |  |
| Light Source        | CREE CXA1512                                                                                   |  |  |
| Beam Angle          | 30°                                                                                            |  |  |
| Color Temperature   | 3000K                                                                                          |  |  |
| CRI ≥               | 80                                                                                             |  |  |
| IP level            | IP20                                                                                           |  |  |
| Main Material       | Aluminum                                                                                       |  |  |
| Wire connection way | Track Adaptor                                                                                  |  |  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |  |  |
| Certificates        | CE . ROHS                                                                                      |  |  |

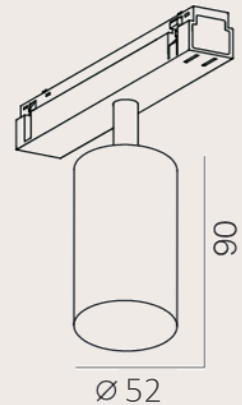


## Optic Data


### Luminous Intensity Distribution Curve

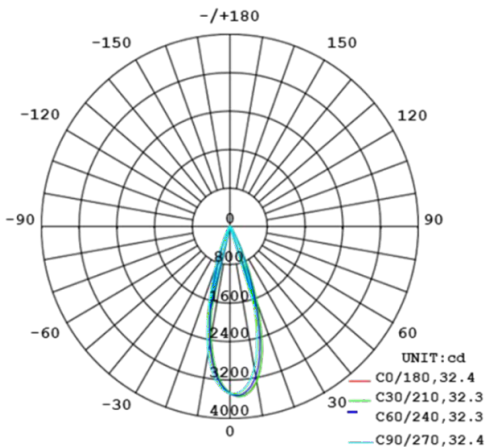

### AAI Figure

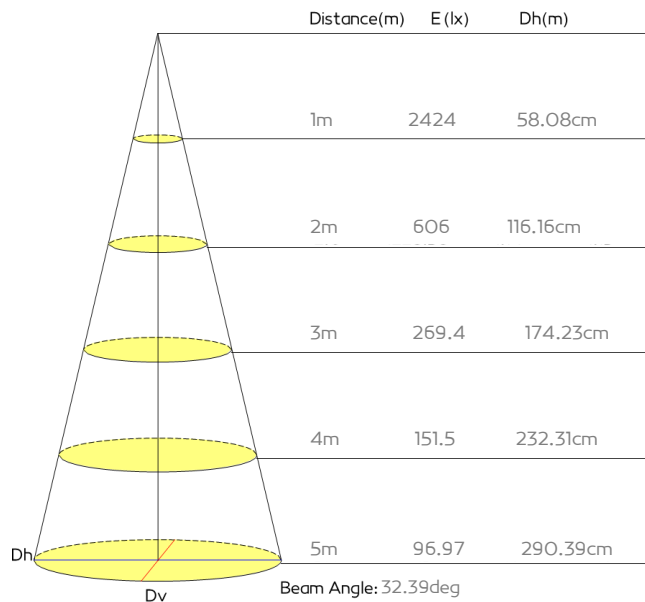


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T235 (BLK)                                                                                     |
| Input Voltage       | DC48 500MA                                                                                     |
| Power(Watts)        | 19W                                                                                            |
| Lumen               | 1890lm                                                                                         |
| Lamp holder         | Ceramic PCB                                                                                    |
| Light Source        | CREE CXB1512                                                                                   |
| Beam Angle          | 30°                                                                                            |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | BLK                                                                                            |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |

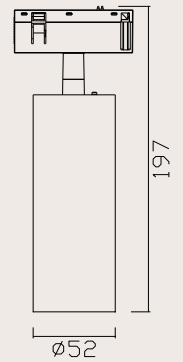


## Optic Data

### Luminous Intensity Distribution Curve

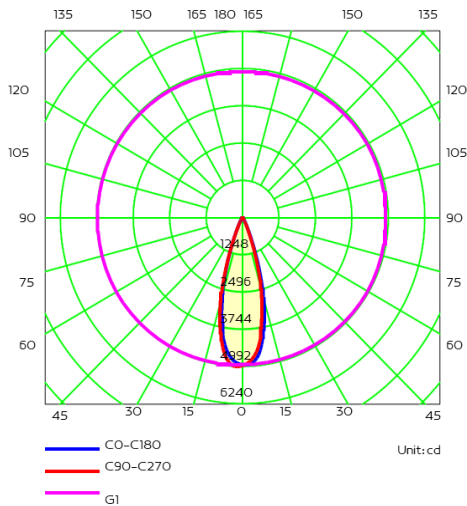

### AAI Figure

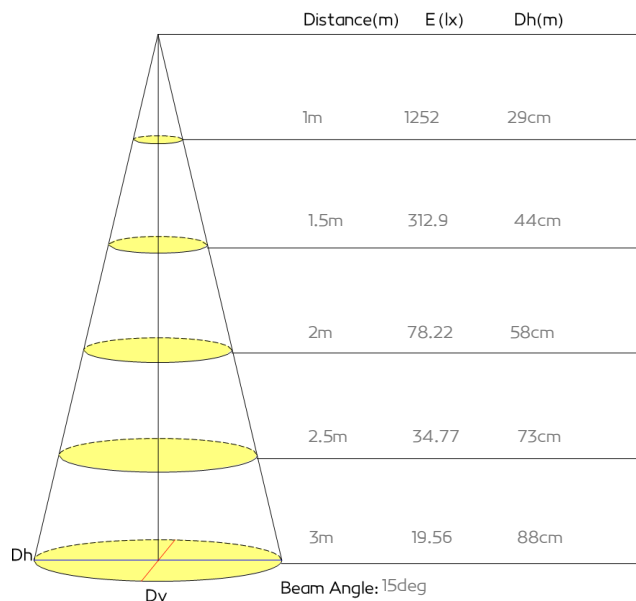


|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Code                | T243 (BLK)                                             |
| Input Voltage       | DC48 DC 700MA                                          |
| Power(Watts)        | 25W                                                    |
| Lumen               | 1808lm-1927lm                                          |
| Lamp holder         | Ceramic PCB                                            |
| Light Source        | Bridgelux V9                                           |
| Beam Angle          | Adjustable 15° to 50°                                  |
| Color Temperature   | 3000K                                                  |
| CRI ≥               | 80                                                     |
| IP level            | IP20                                                   |
| Main Material       | Aluminum                                               |
| Body Color          | BLK                                                    |
| Wire connection way | Track Adaptor                                          |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II |
| Certificates        | CE . ROHS                                              |




## Optic Data


### Luminous Intensity Distribution Curve

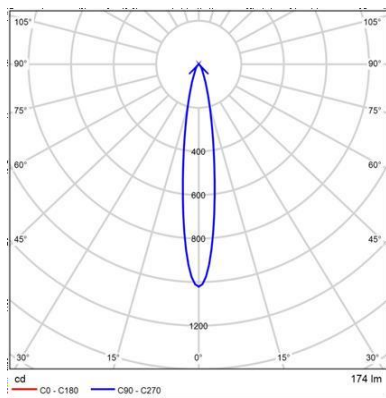

### AAI Figure

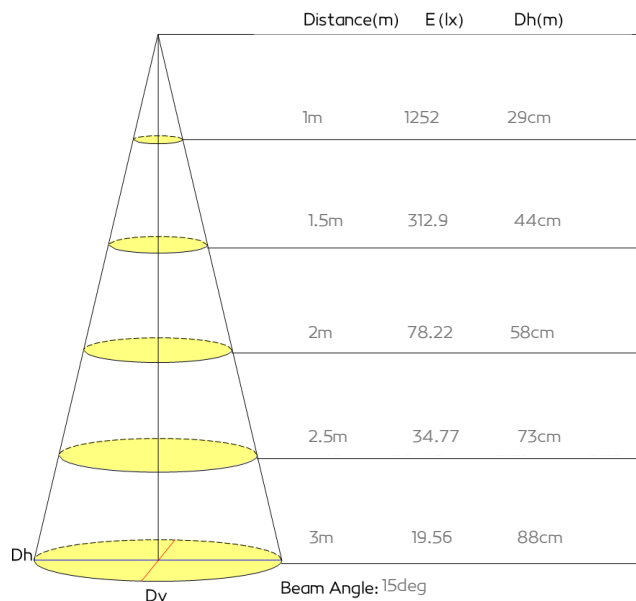

|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Code                | T314 (BLK)                                             |
| Input Voltage       | DC48                                                   |
| Power(Watts)        | 13W                                                    |
| Lumen               | 1696lm                                                 |
| Lamp holder         | Ceramic PCB                                            |
| Color Temperature   | 3000K                                                  |
| CRI $\geq$          | 90                                                     |
| IP level            | IP20                                                   |
| Main Material       | Aluminum                                               |
| Body Color          | BLK                                                    |
| Wire connection way | Track Adaptor                                          |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II |
| Certificates        | CE , ROHS                                              |


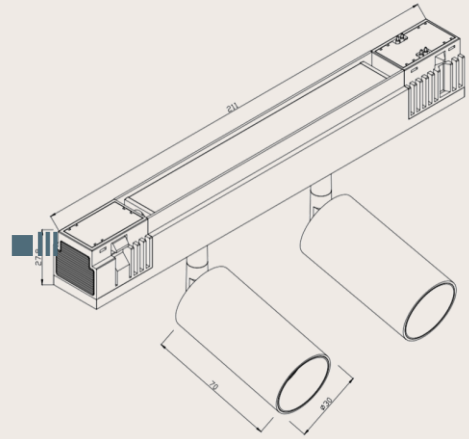


### Optic Data

Luminous Intensity Distribution Curve


AAI Figure

|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T293 (BLK) / T324 (Dark gray) / T325 (Nickel)                                                  |
| Input Voltage       | DC48 DC 500MA                                                                                  |
| Power(Watts)        | 2x2W (4W)                                                                                      |
| Lumen               | 264lm                                                                                          |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | CREE XPE-2                                                                                     |
| Beam Angle          | 24°                                                                                            |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |

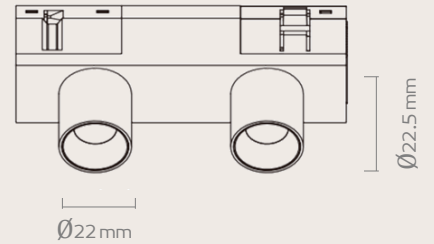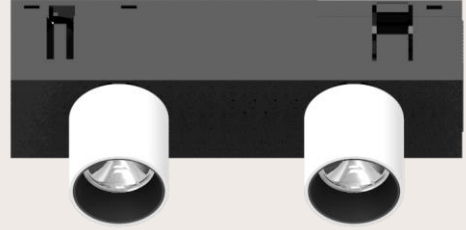


## Optic Data


### Luminous Intensity Distribution Curve

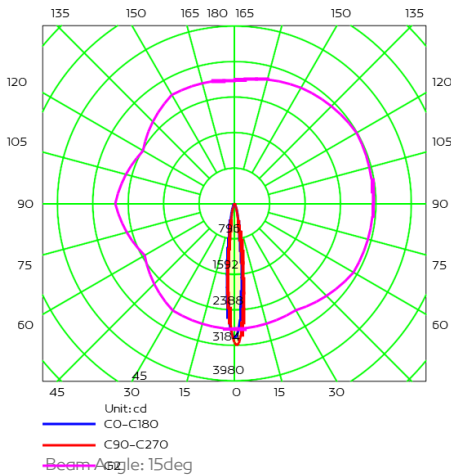

### AAI Figure

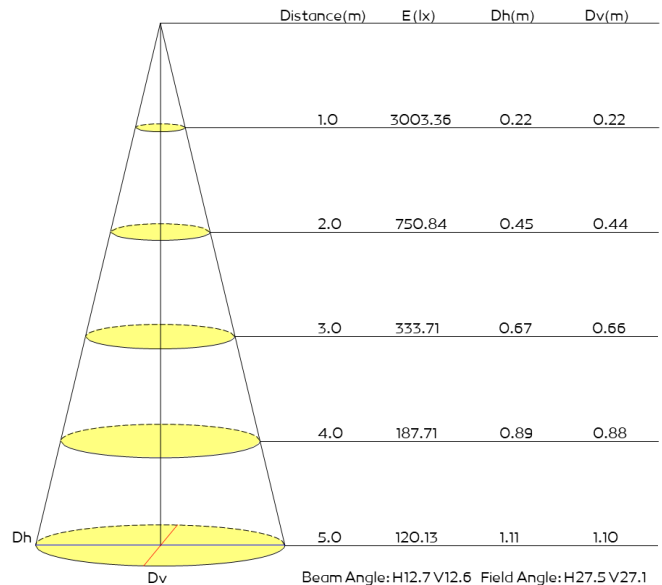


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T240 (WHT) / T241 (BLK)                                                                        |
| Input Voltage       | DC48 700MA                                                                                     |
| Power(Watts)        | 20W                                                                                            |
| Lumen               | 1397.6lm                                                                                       |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | Bridgelux 2835                                                                                 |
| Beam Angle          | 110°                                                                                           |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Wire connection way | WHT / BLK                                                                                      |
| Class               | Track Adaptor                                                                                  |
| Certificates        | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Dimmable            | CE . ROHS                                                                                      |

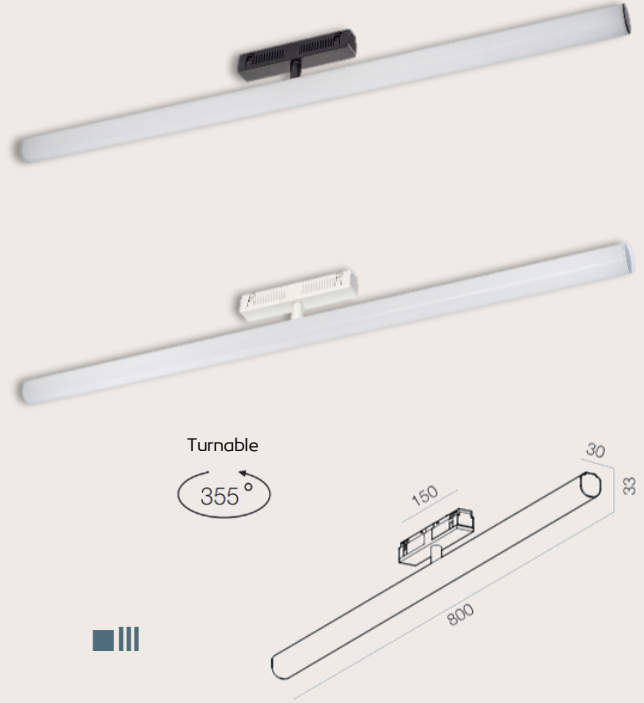


## Optic Data


### Luminous Intensity Distribution Curve

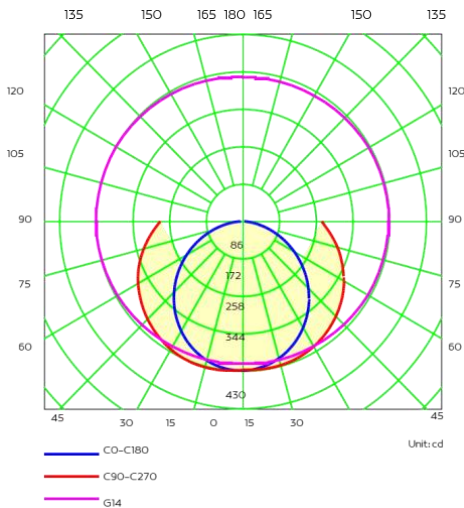

### AAI Figure

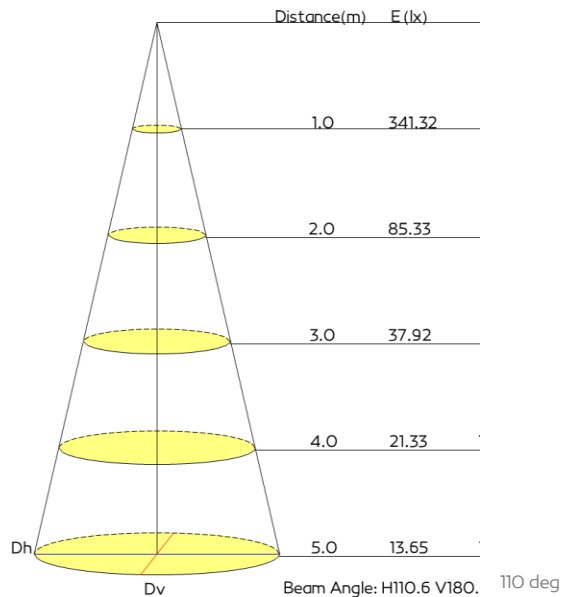


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T265 (WHT) / T266 (BLK)                                                                        |
| Input Voltage       | D C48                                                                                          |
| Power(Watts)        | 10W                                                                                            |
| Lumen               | 780lm                                                                                          |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | Bridgelux 2835                                                                                 |
| Beam Angle          | 110°                                                                                           |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT / BLK                                                                                      |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |




## Optic Data


### Luminous Intensity Distribution Curve

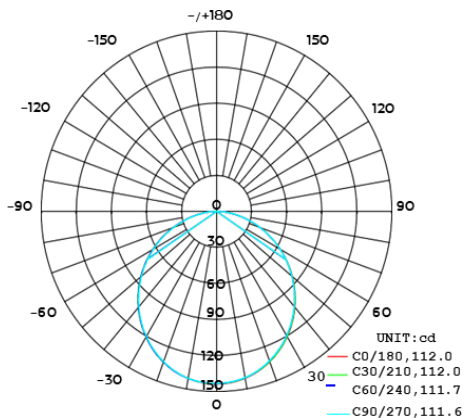

### AAI Figure

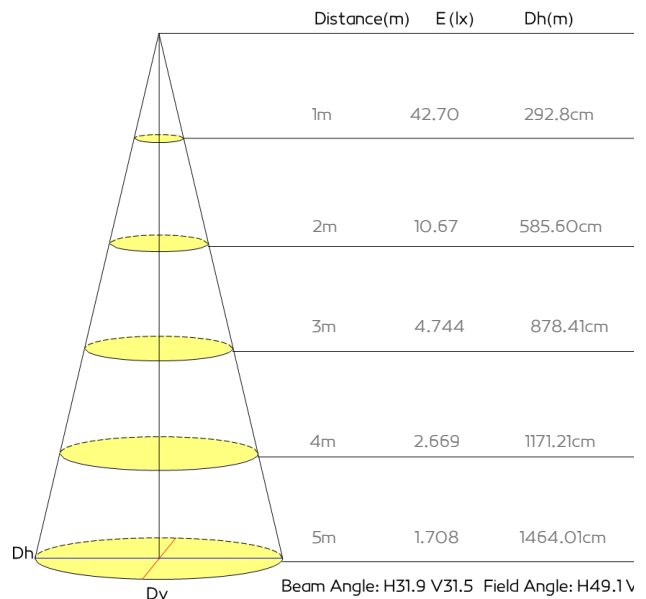


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T238 (WHT) / T239 (BLK)                                                                        |
| Input Voltage       | DC48 350MA                                                                                     |
| Power(Watts)        | 6W                                                                                             |
| Lumen               | 384.5lm                                                                                        |
| Lamp holder         | Ceramic PCB                                                                                    |
| Light Source        | Bridgelux 2835                                                                                 |
| Beam Angle          | 110°                                                                                           |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT / BLK                                                                                      |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |




## Optic Data


### Luminous Intensity Distribution Curve

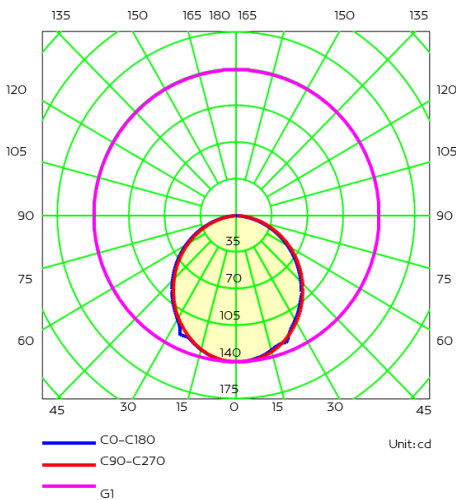

### AAI Figure

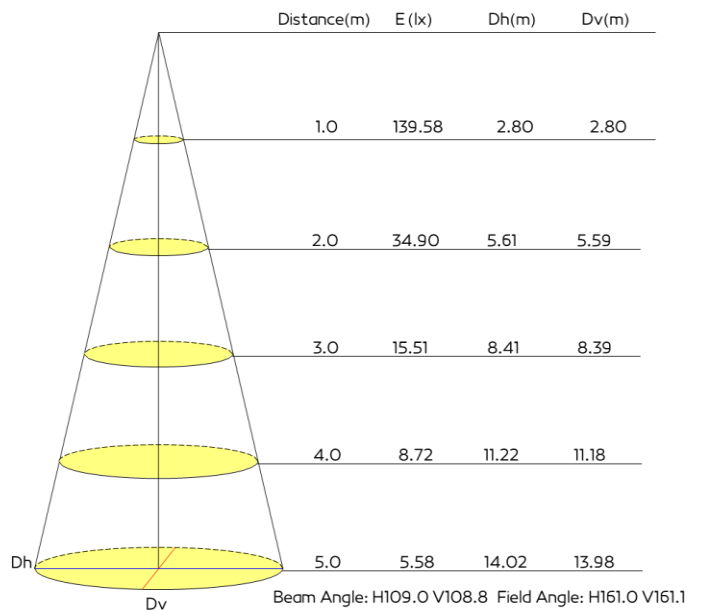


|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Code                | T177 (BLK)                                             |
| Input Voltage       | DC48 350MA                                             |
| Power(Watts)        | 5W                                                     |
| Lumen               | 384lm                                                  |
| Lamp holder         | Aluminum PCB                                           |
| Light Source        | Bridgelux 2835                                         |
| Beam Angle          | 110°                                                   |
| Color Temperature   | 3000K                                                  |
| CRI ≥               | 80                                                     |
| IP level            | IP20                                                   |
| Main Material       | Aluminum                                               |
| Body Color          | BLK                                                    |
| Wire connection way | Track Adaptor                                          |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II |
| Certificates        | CE . ROHS                                              |

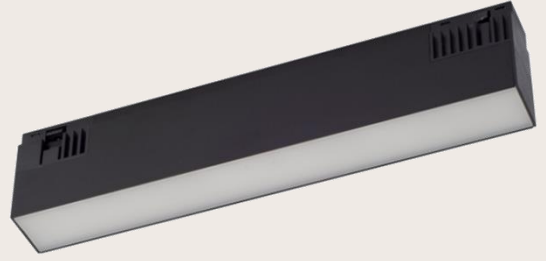


## Optic Data



### Luminous Intensity Distribution Curve

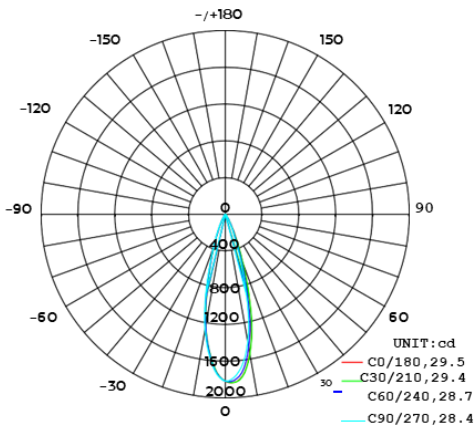

### AAI Figure

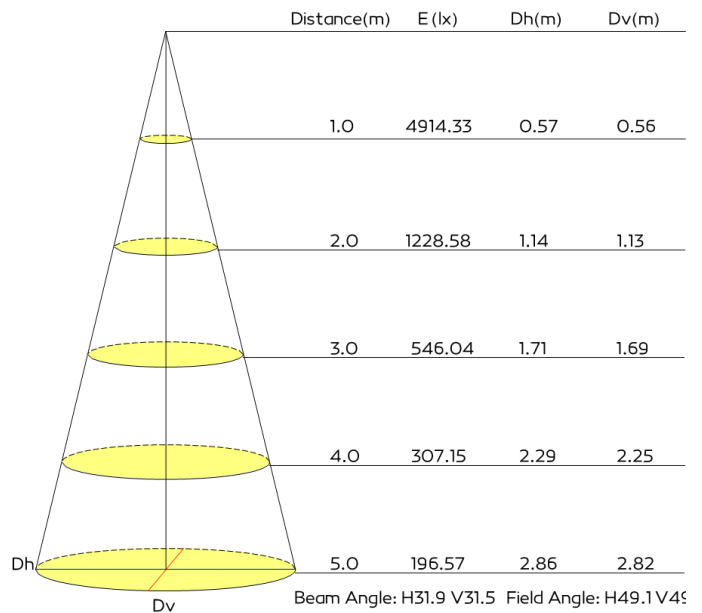


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T178 (BLK) / T379 (WHT)                                                                        |
| Input Voltage       | DC48 350MA                                                                                     |
| Power(Watts)        | 11W                                                                                            |
| Lumen               | 783lm                                                                                          |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | Bridgelux 2835                                                                                 |
| Beam Angle          | 110°                                                                                           |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT / BLK                                                                                      |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |

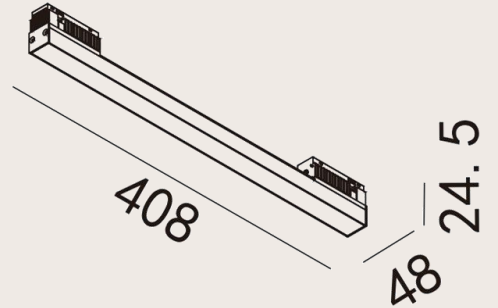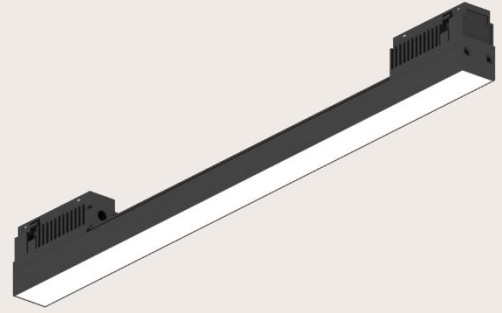


## Optic Data



### Luminous Intensity Distribution Curve

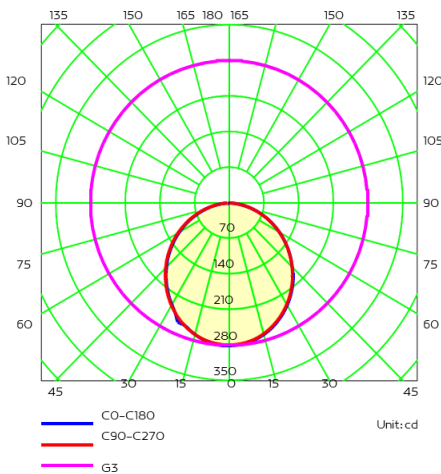

### AAI Figure

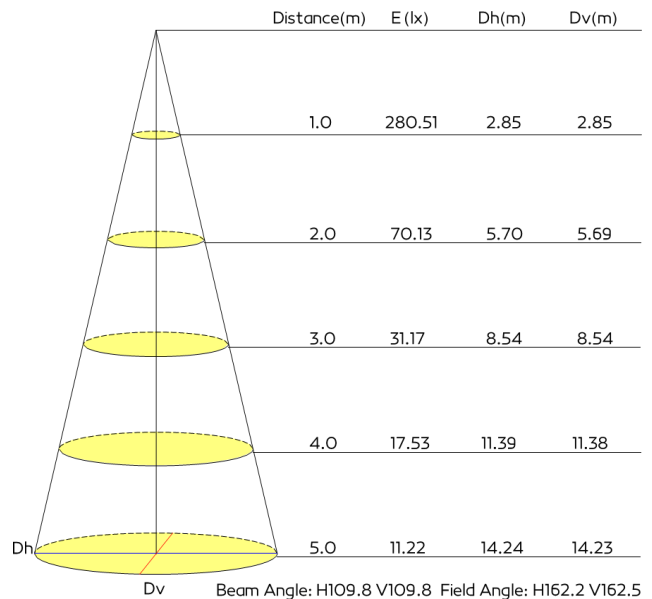


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T131 (BLK) / T262 (WHT)                                                                        |
| Input Voltage       | DC48 350MA                                                                                     |
| Power(Watts)        | 11W                                                                                            |
| Lumen               | 783lm                                                                                          |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | Bridgelux 2835                                                                                 |
| Beam Angle          | 110°                                                                                           |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT / BLK                                                                                      |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |

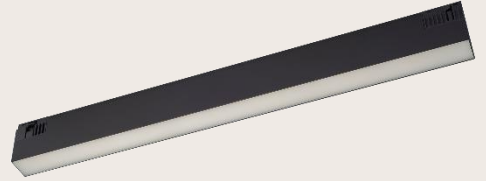


## Optic Data

### Luminous Intensity Distribution Curve

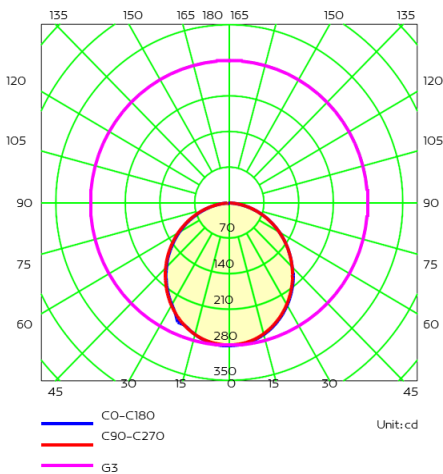

### AAI Figure

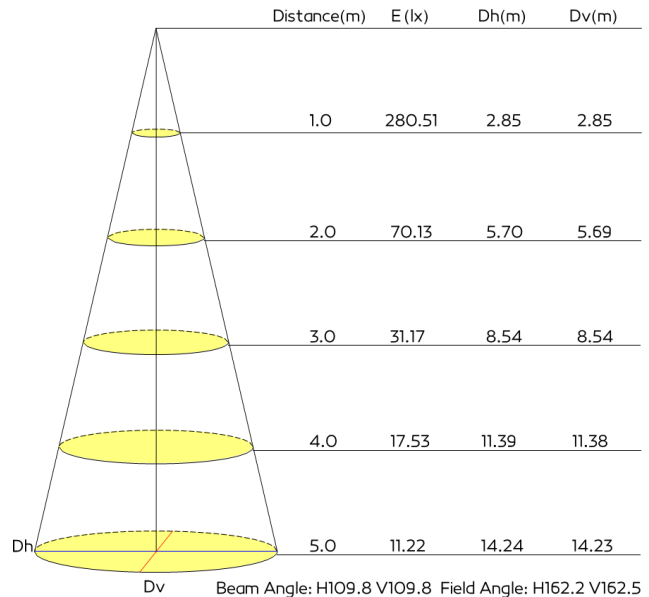


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T244 (WHT)                                                                                     |
| Input Voltage       | DC48 500MA                                                                                     |
| Power(Watts)        | 18W                                                                                            |
| Lumen               | 1470lm                                                                                         |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | Bridgelux 2835                                                                                 |
| Beam Angle          | 110°                                                                                           |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT                                                                                            |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |




## Optic Data


### Luminous Intensity Distribution Curve

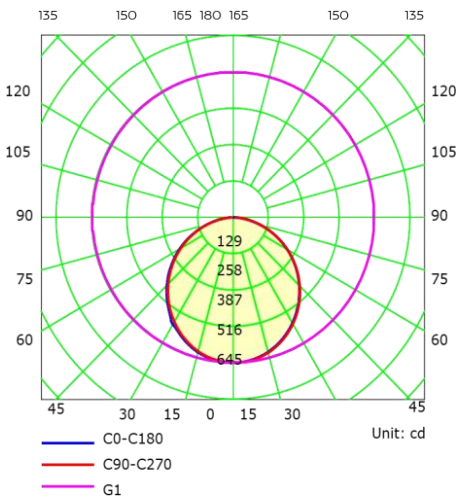

### AAI Figure

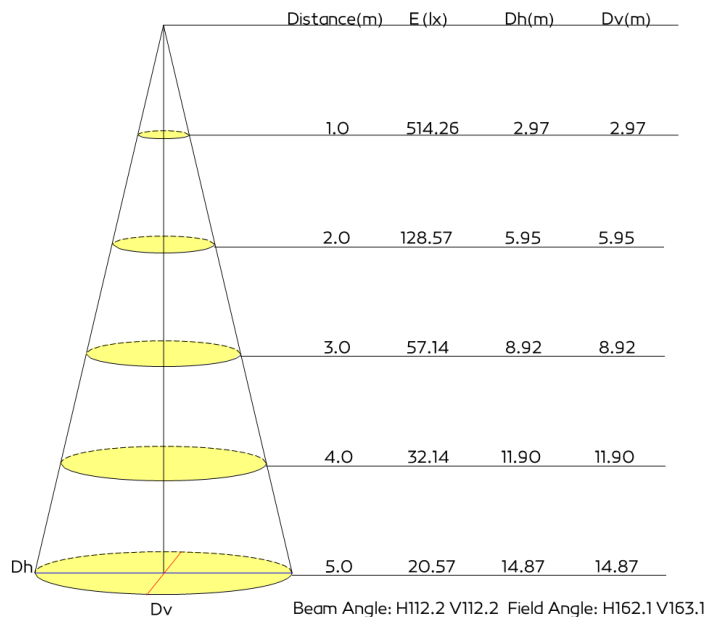


|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Code                | T304 (WHT) / T305 (BLK)                                |
| Input Voltage       | DC48 500MA                                             |
| Power(Watts)        | 18W                                                    |
| Lumen               | 1470lm                                                 |
| Lamp holder         | Aluminum PCB                                           |
| Light Source        | Bridgelux 2835                                         |
| Beam Angle          | 110°                                                   |
| Color Temperature   | 3000K                                                  |
| CRI ≥               | 90                                                     |
| IP level            | IP20                                                   |
| Main Material       | Aluminum                                               |
| Body Color          | WHT / BLK                                              |
| Wire connection way | Track Adaptor                                          |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II |
| Certificates        | CE . ROHS                                              |

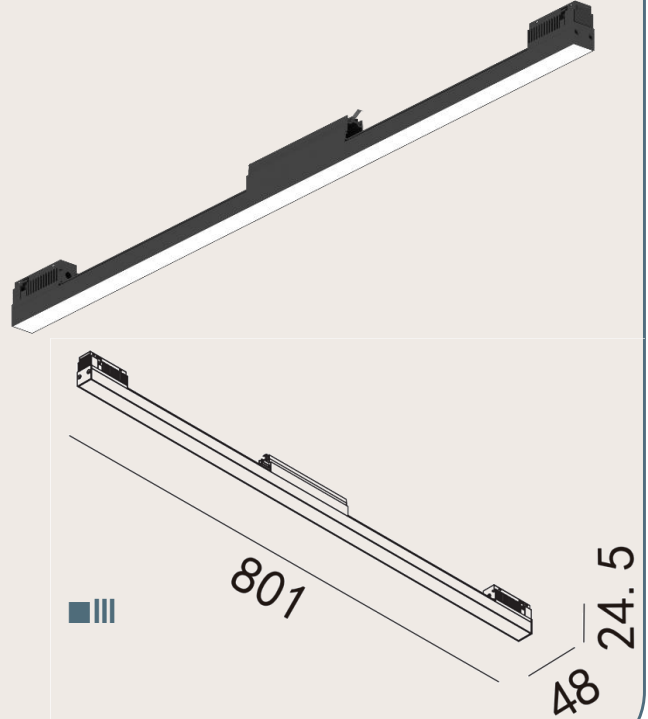


## Optic Data


### Luminous Intensity Distribution Curve

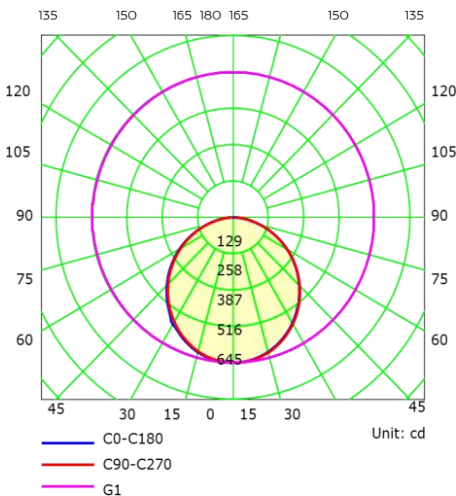

### AAI Figure

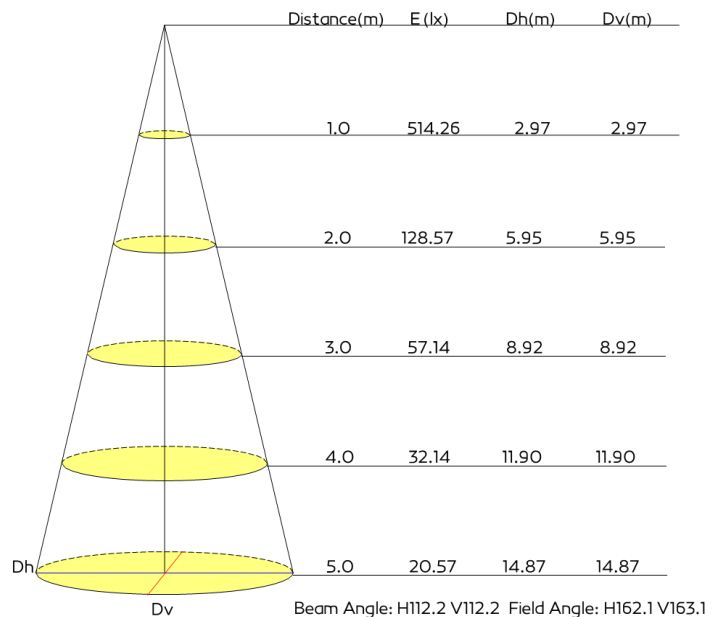


|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Code                | T189 (BLK) / T264 (WHT)                                |
| Input Voltage       | DC48 350MA                                             |
| Power(Watts)        | 10W                                                    |
| Lumen               | 584.1lm                                                |
| Lamp holder         | Aluminum PCB                                           |
| Light Source        | Bridgelux 2835                                         |
| Beam Angle          | 95°                                                    |
| Color Temperature   | 3000K                                                  |
| CRI ≥               | 80                                                     |
| IP level            | IP20                                                   |
| Main Material       | Aluminum                                               |
| Body Color          | WHT / BLK                                              |
| Wire connection way | Track Adaptor                                          |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II |
| Certificates        | CE . ROHS                                              |

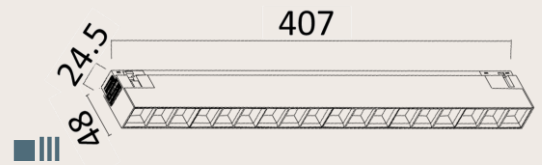


## Optic Data


### Luminous Intensity Distribution Curve

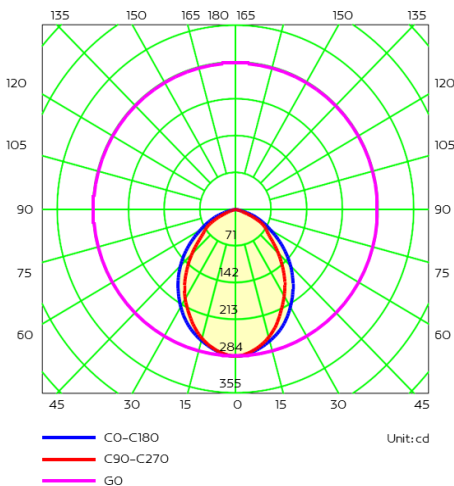

### AAI Figure

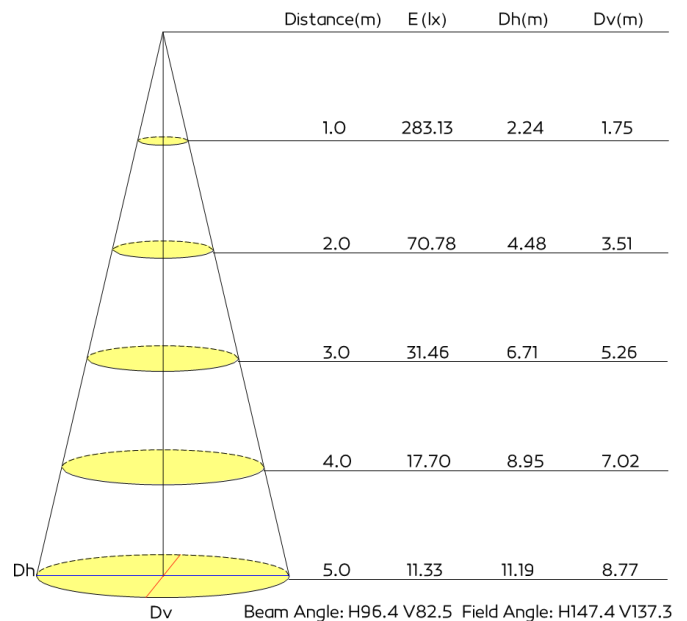


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T248 (WHT) / T249 (BLK)                                                                        |
| Input Voltage       | DC48 350MA                                                                                     |
| Power(Watts)        | 9x1.1W (12W)                                                                                   |
| Lumen               | 849lm                                                                                          |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | CREE XPE-2                                                                                     |
| Beam Angle          | 24°                                                                                            |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT                                                                                            |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |

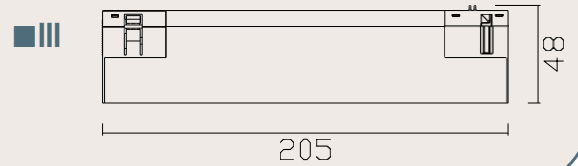


## Optic Data



### Luminous Intensity Distribution Curve

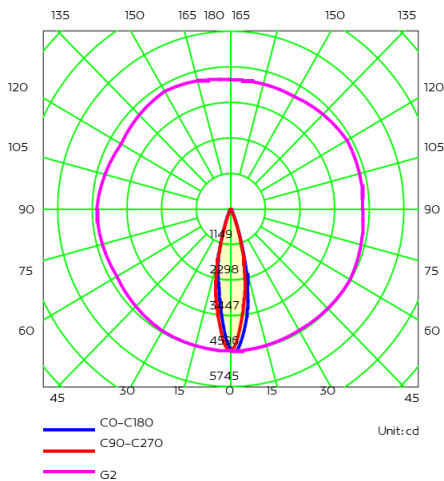

### AAI Figure

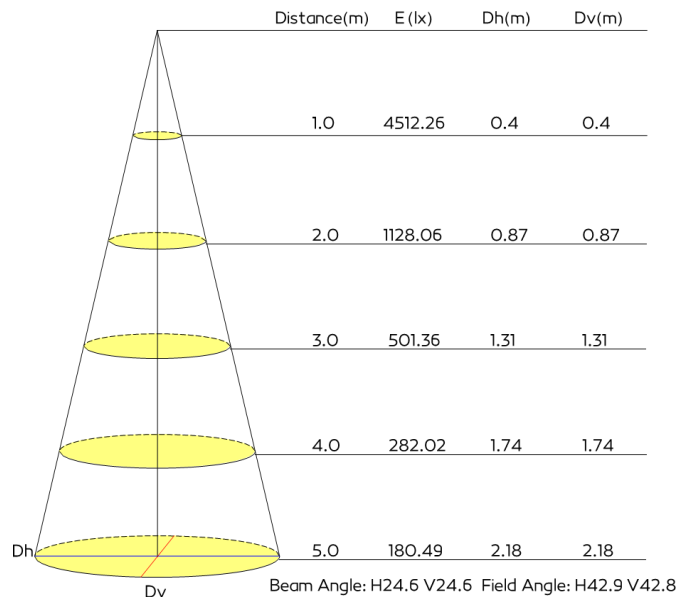


|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Code                | T290 (WHT) / T291 (BLK)                                |
| Input Voltage       | DC48 350MA                                             |
| Power(Watts)        | 9x1.1W (12W)                                           |
| Lumen               | 966lm                                                  |
| Lamp holder         | Aluminum PCB                                           |
| Light Source        | CREE 3030                                              |
| Beam Angle          | 58°                                                    |
| Color Temperature   | 3000K                                                  |
| CRI ≥               | 80                                                     |
| IP level            | IP20                                                   |
| Main Material       | Aluminum                                               |
| Body Color          | WHT / BLK                                              |
| Wire connection way | Track Adaptor                                          |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II |
| Certificates        | CE . ROHS                                              |

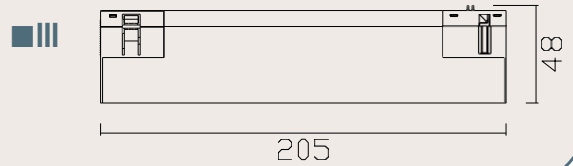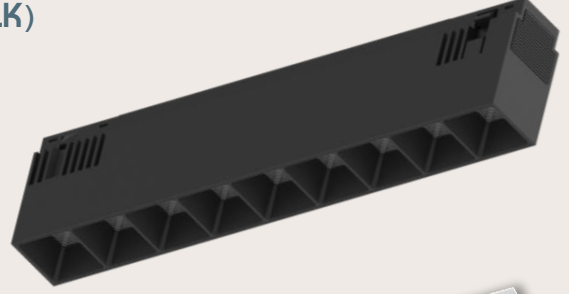

## Optic Data


### Luminous Intensity Distribution Curve

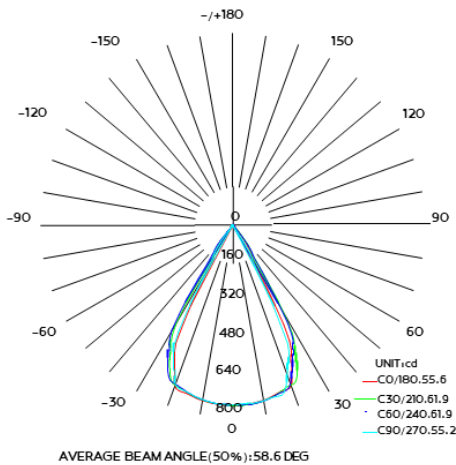

### AAI Figure


| Fluxout:494.0lm |               |                |           |
|-----------------|---------------|----------------|-----------|
| Height          | Eavg,Emax     | Angle:55.17deg | Diameter  |
| 1m              | 556.2,753.9lx |                | 104.49cm  |
| 2m              | 139.1,188.5lx |                | 208.98cm  |
| 3m              | 61.8,83.77lx  |                | 313.47cm  |
| 4m              | 34.76,47.12lx |                | 417.95cm  |
| 5m              | 22.25,30.16lx |                | 522.44cm  |
| 6m              | 15.45,20.94lx |                | 626.93cm  |
| 7m              | 11.35,15.39lx |                | 731.42cm  |
| 8m              | 8.69,11.78lx  |                | 835.91cm  |
| 9m              | 6.86,9.307lx  |                | 940.40cm  |
| 10m             | 5.56,7.539lx  |                | 1044.88cm |

|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T186 (BLK) / T310 (WHT)                                                                        |
| Input Voltage       | DC48 350MA                                                                                     |
| Power(Watts)        | 10W                                                                                            |
| Lumen               | 526lm                                                                                          |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | CREE XPE-2                                                                                     |
| Beam Angle          | 23°x43° Assymetric                                                                             |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT / BLK                                                                                      |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE , ROHS                                                                                      |

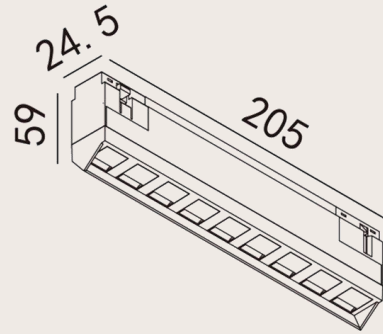


## Optic Data


### Luminous Intensity Distribution Curve

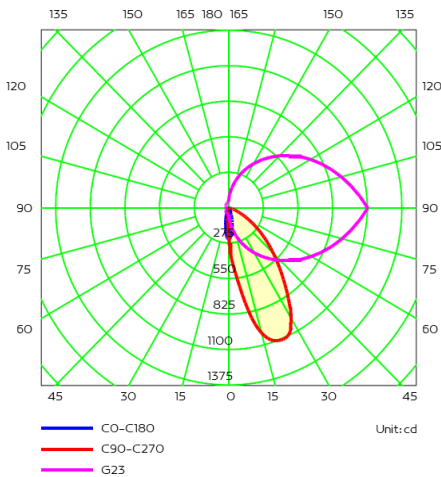

### AAI Figure

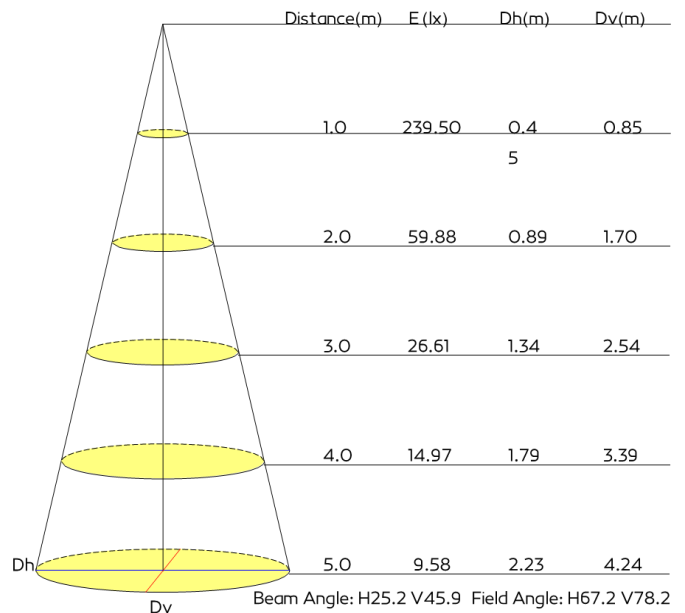


|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Code                | T250 (WHT) / T251 (BLK)                                |
| Input Voltage       | DC48 700MA                                             |
| Power(Watts)        | 18x1.1W (20W)                                          |
| Lumen               | 1697lm                                                 |
| Lamp holder         | Aluminum PCB                                           |
| Light Source        | CREE XPE-2                                             |
| Beam Angle          | 24°                                                    |
| Color Temperature   | 3000K                                                  |
| CRI ≥               | 80                                                     |
| IP level            | IP20                                                   |
| Main Material       | Aluminum                                               |
| Body Color          | WHT / BLK                                              |
| Wire connection way | Track Adaptor                                          |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II |
| Certificates        | CE . ROHS                                              |




## Optic Data


### Luminous Intensity Distribution Curve

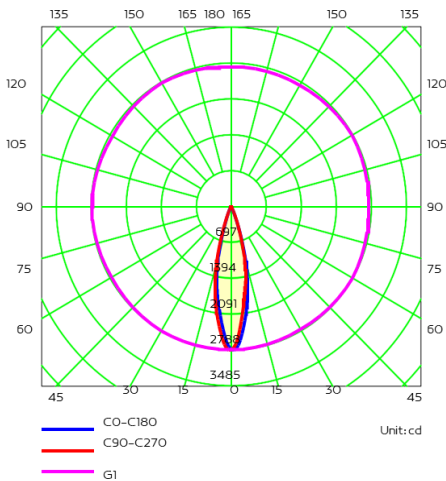

### AAI Figure

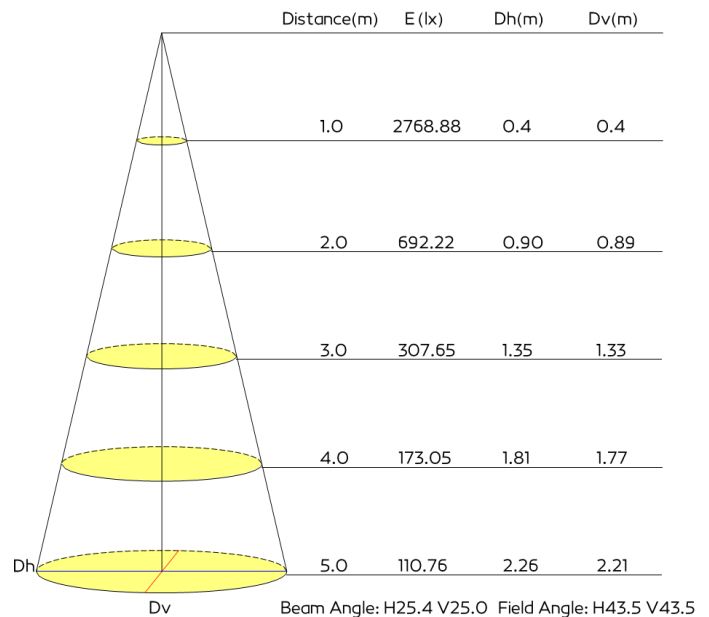


|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Code                | T252 (WHT) / T253 (BLK)                                |
| Input Voltage       | DC48                                                   |
| Power(Watts)        | 36x1.1W (40W)                                          |
| Lumen               | 3022lm                                                 |
| Lamp holder         | Aluminum PCB                                           |
| Light Source        | CREE XPE-2                                             |
| Beam Angle          | 24°                                                    |
| Color Temperature   | 3000K                                                  |
| CRI ≥               | 80                                                     |
| IP level            | IP20                                                   |
| Main Material       | Aluminum                                               |
| Body Color          | WHT / BLK                                              |
| Wire connection way | Track Adaptor                                          |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II |
| Certificates        | CE . ROHS                                              |

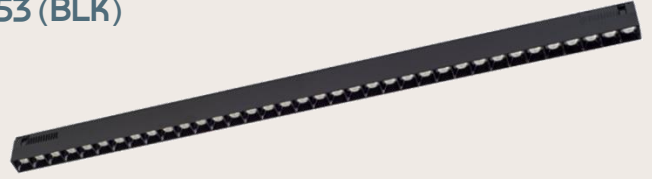


## Optic Data


### Luminous Intensity Distribution Curve

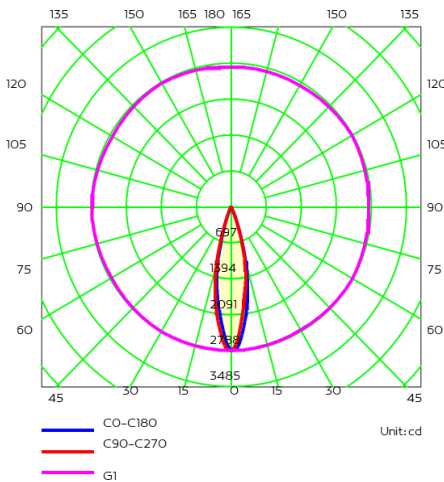

### AAI Figure

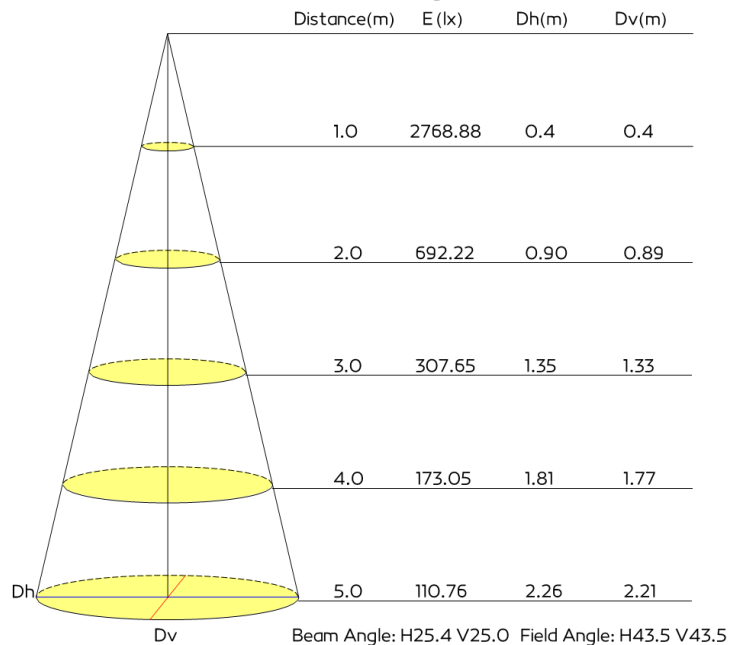


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T256 (WHT) / T257 (BLK)                                                                        |
| Input Voltage       | DC48 500MA                                                                                     |
| Power(Watts)        | 18W                                                                                            |
| Lumen               | 898.6lm                                                                                        |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | Bridgelux 2835                                                                                 |
| Beam Angle          | 96°                                                                                            |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT / BLK                                                                                      |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |

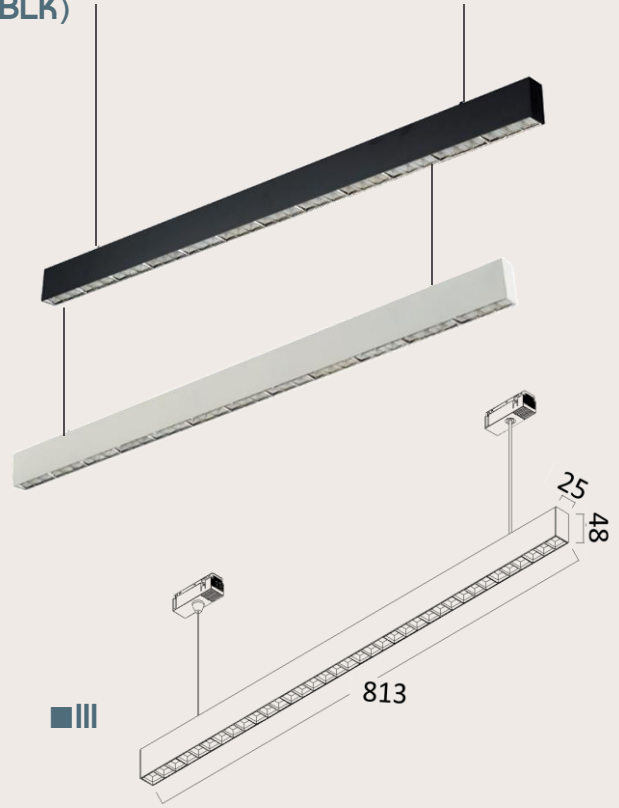


## Optic Data


### Luminous Intensity Distribution Curve

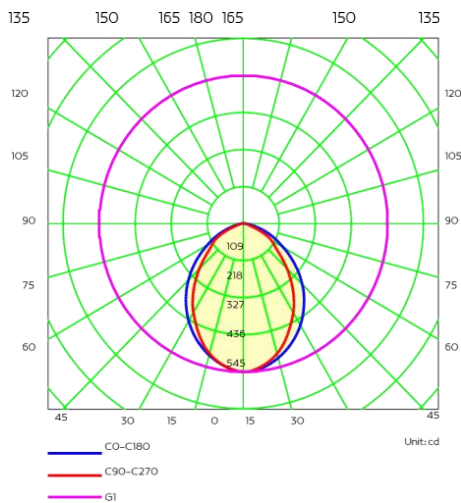

### AAI Figure

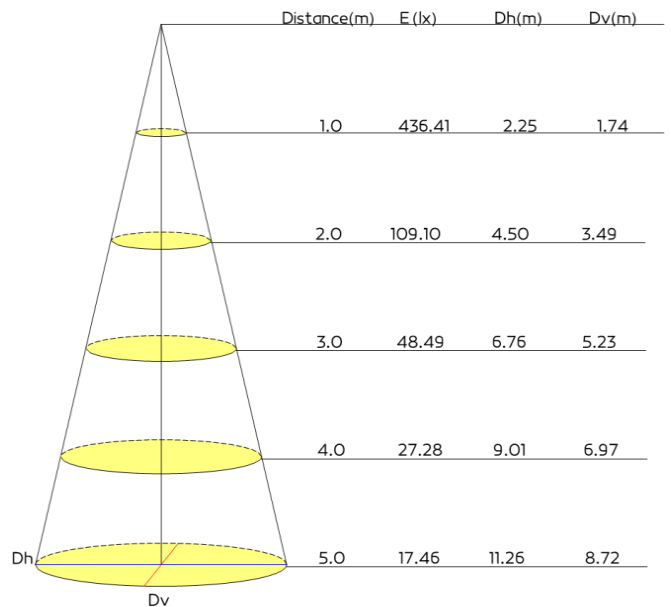


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T236 (WHT) / T237 (BLK)                                                                        |
| Input Voltage       | DC48                                                                                           |
| Power(Watts)        | 6x1.1W (6.6W)                                                                                  |
| Lumen               | 592lm                                                                                          |
| Lamp holder         | Aluminum PCB                                                                                   |
| Light Source        | CREE XPE-2                                                                                     |
| Beam Angle          | 24°                                                                                            |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT / BLK                                                                                      |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |




## Optic Data


### Luminous Intensity Distribution Curve

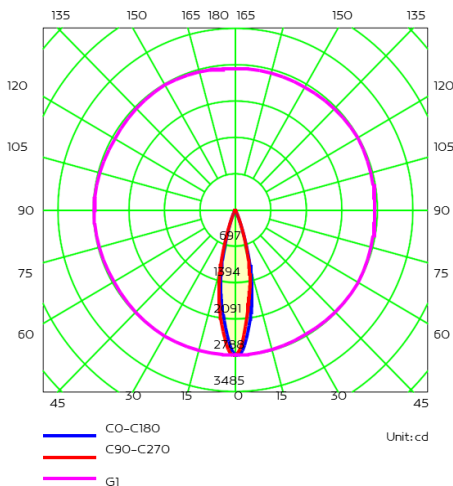

### AAI Figure

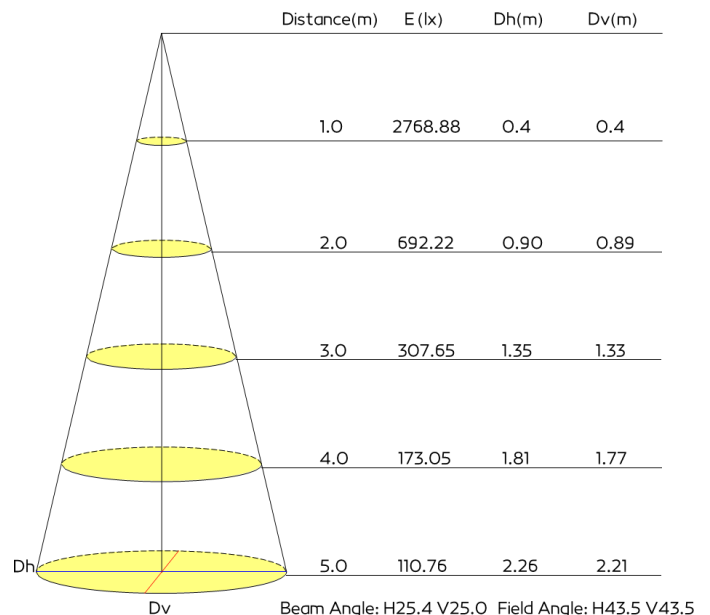


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T187 (BLK) / T263 (WHT)                                                                        |
| Input Voltage       | DC48 350MA                                                                                     |
| Power(Watts)        | 9x1.1W (10W)                                                                                   |
| Lumen               | 916.4lm                                                                                        |
| Lamp holder         | Ceramic PCB                                                                                    |
| Light Source        | CREE XPE-2                                                                                     |
| Beam Angle          | 24°                                                                                            |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 80                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | WHT / BLK                                                                                      |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Certificates        | CE . ROHS                                                                                      |

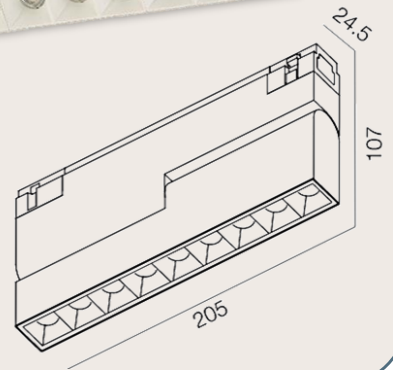


## Optic Data


### Luminous Intensity Distribution Curve

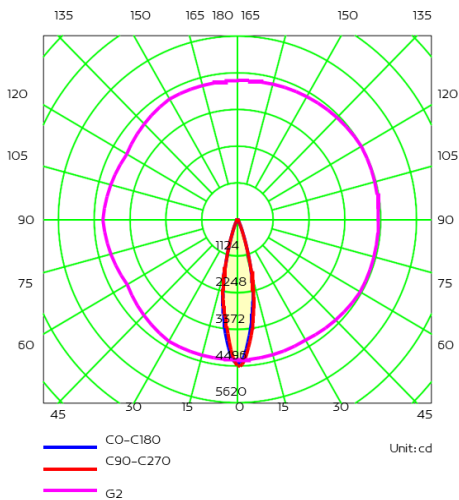

### AAI Figure

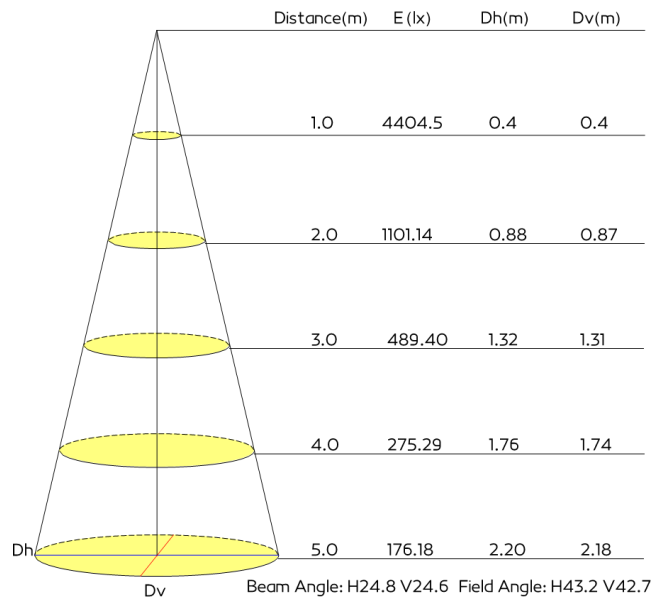


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | T298 (WHT) / T299 (BLK)                                                                        |
| Input Voltage       | DC48                                                                                           |
| Power(Watts)        | 29W                                                                                            |
| Lumen               | 1271lm                                                                                         |
| Lamp holder         | Ceramic PCB                                                                                    |
| Light Source        | Bright Lighting SMD2835                                                                        |
| Beam Angle          | 178°                                                                                           |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 90                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Wire connection way | WHT / BLK                                                                                      |
| Class               | Track Adaptor                                                                                  |
| Certificates        | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |
| Dimmable            | CE , ROHS                                                                                      |

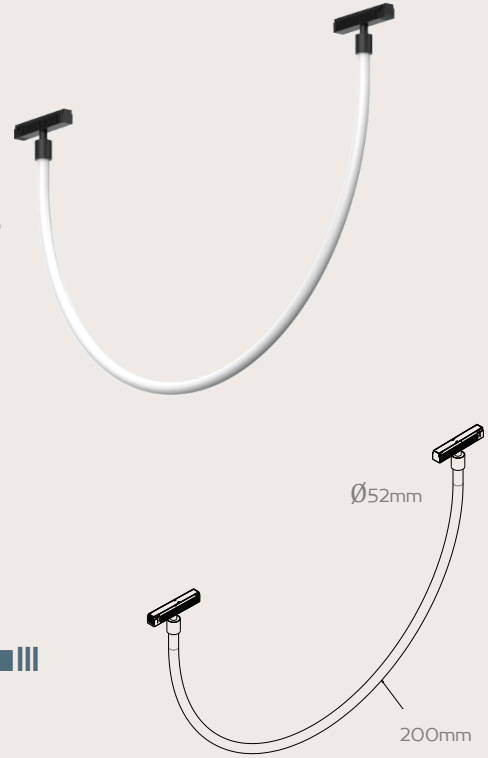


## Optic Data

Luminous Intensity Distribution Curve

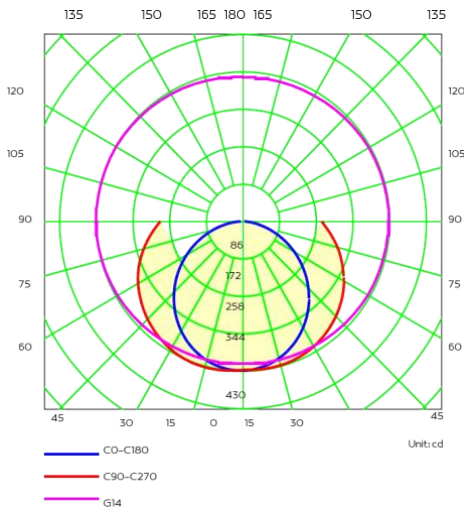

AAI Figure

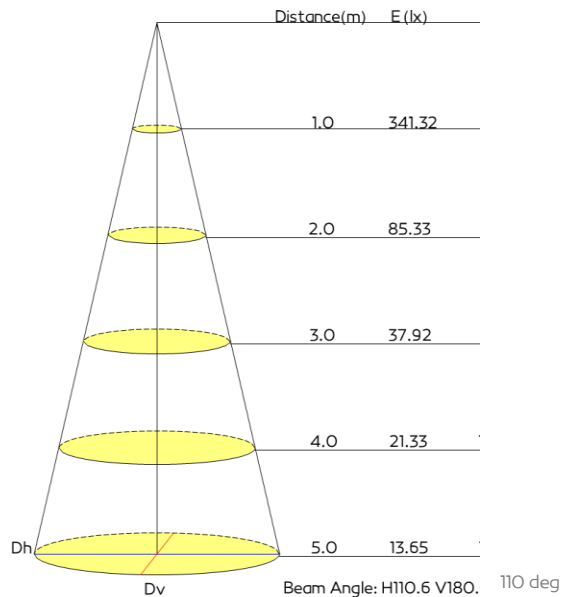

## T14

Included:

6xT130 + 3xT131 + 6x 600 mm Track + 6x 120° connector

Code: T235



Input Voltage

DC48 500MA

Power(Watts)

18.5W

Lumen

1890lm

Lamp holder

Ceramic PCB

Light Source

CREE CXB1512

Beam Angle

30°

Color Temperature

3000K

CRI ≥

90

IP Level

20

Main Material

Aluminum

Body Color

Black / White

Installation Type

Pendant  
Ceiling Surface

Code: T131



Input Voltage

DC48 350MA

Power(Watts)

10.2W

Lumen

783lm

Lamp holder



Aluminum PCB

Light Source

Bridgelux 2835

Beam Angle

110°

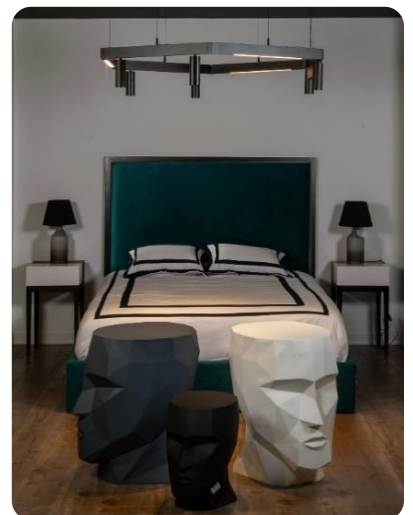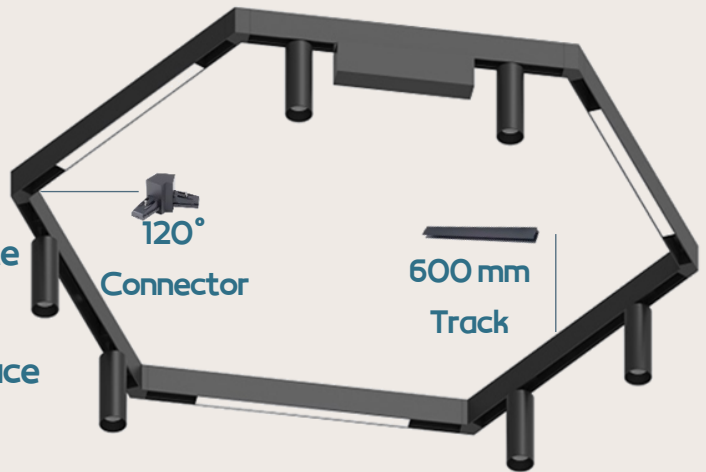



Magnetic Multi Track Light





MAKE MORE  
OF THE  
MOMENT



Magnetic Multi Track Light





Magnetic Multi Track Light






Magnetic Multi Track Light



نوران  
NOORAIN



# Description of accessories

## Profile ►

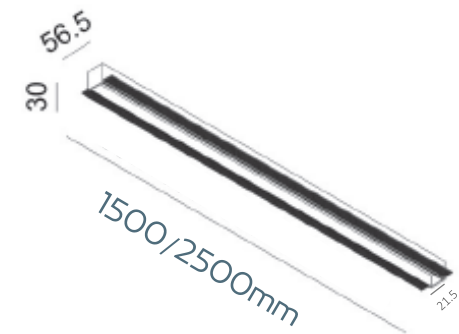


| Length | Code No. |
|--------|----------|
| 1500mm | LC1500   |
| 2500mm | LC2500   |

## Track Installation Connectors & Accessories ►




| Code No. | Size(mm) | Colour |
|----------|----------|--------|
|----------|----------|--------|

|         |         |       |
|---------|---------|-------|
| LC1010A | 115x115 | Black |
|---------|---------|-------|




|         |         |       |
|---------|---------|-------|
| LC1010B | 100x100 | Black |
|---------|---------|-------|

|                     |                                                        |
|---------------------|--------------------------------------------------------|
| Code                | LC152                                                  |
| Input Voltage       | DC 24V                                                 |
| Power(Watts)        | 12W                                                    |
| Lumen               | 1440lm                                                 |
| Light Source        | EDS LED                                                |
| Color Temperature   | 3000K                                                  |
| CRI ≥               | 90                                                     |
| IP level            | IP20                                                   |
| Main Material       | Aluminum                                               |
| Body Color          | Black                                                  |
| Wire connection way | Track Adaptor                                          |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II |

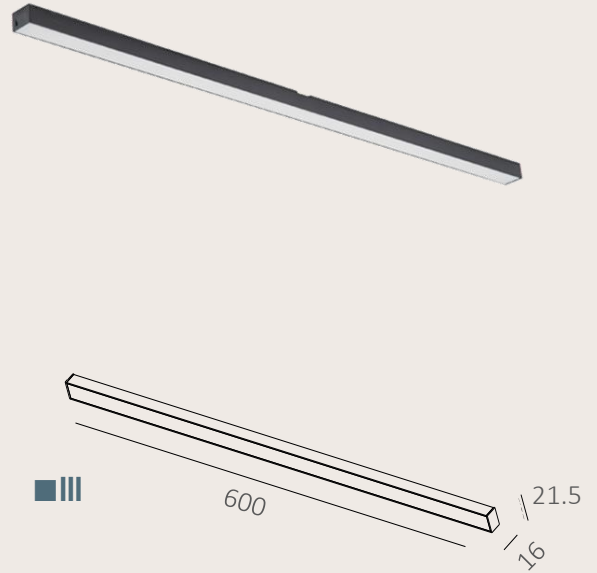


## Optic Data

### Luminous Intensity Distribution Curve

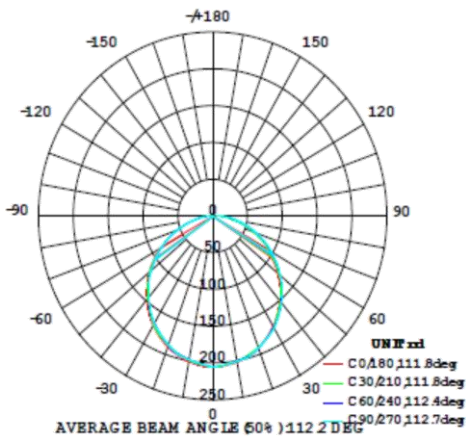


|                     |                                                                                     |
|---------------------|-------------------------------------------------------------------------------------|
| Code                | LC153                                                                               |
| Input Voltage       | DC 24V                                                                              |
| Power(Watts)        | 15 W                                                                                |
| Lumen               | 1350lm                                                                              |
| Light Source        | EDS LED                                                                             |
| Color Temperature   | 3000K                                                                               |
| CRI ≥               | 90                                                                                  |
| IP level            | IP20                                                                                |
| Main Material       | Aluminum                                                                            |
| Body Color          | Black                                                                               |
| Wire connection way | Track Adaptor                                                                       |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input type="checkbox"/> III |

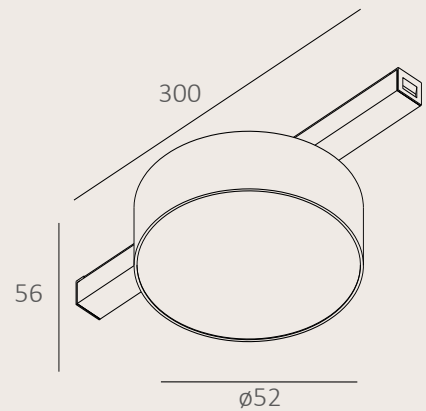



## Optic Data

### Luminous Intensity Distribution Curve

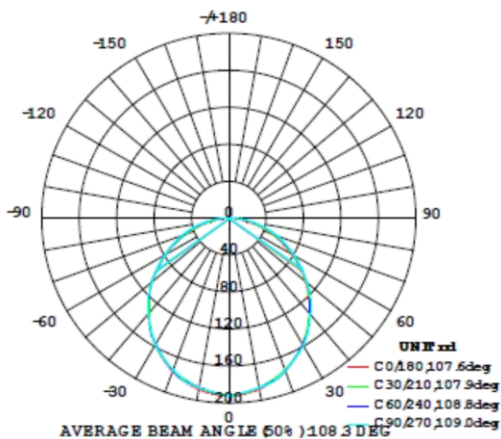


## Magnetic Multi Track Light

|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | LC199                                                                                          |
| Input Voltage       | DC 24V                                                                                         |
| Power(Watts)        | 6W                                                                                             |
| Lumen               | 540lm                                                                                          |
| Light Source        | TEEN LED                                                                                       |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 90                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | Black                                                                                          |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |

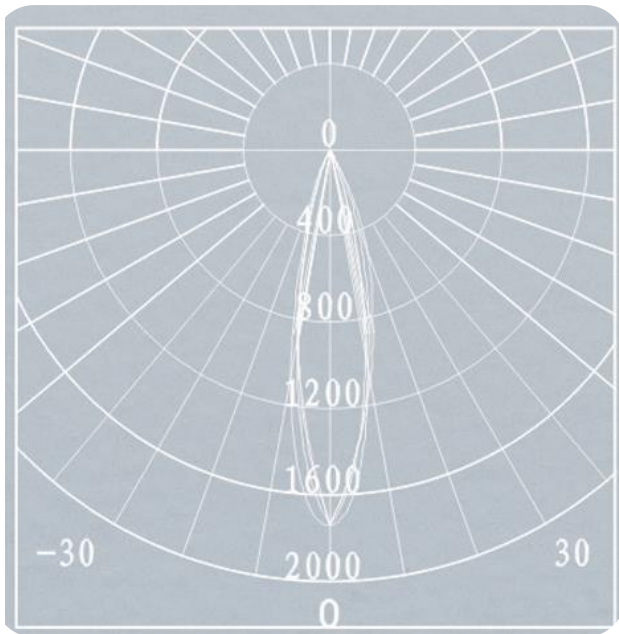


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | LC154                                                                                          |
| Input Voltage       | DC 24V                                                                                         |
| Power(Watts)        | 12W                                                                                            |
| Lumen               | 1380lm                                                                                         |
| Light Source        | LUMILEDS LED                                                                                   |
| Color Temperature   | 3000K                                                                                          |
| CRI $\geq$          | 90                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | Black                                                                                          |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |


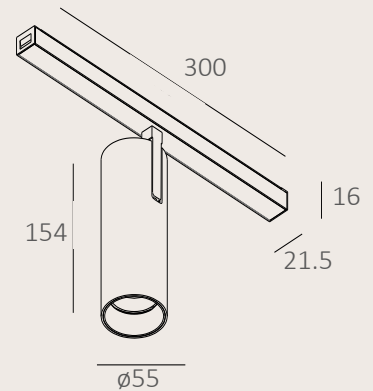


## Optic Data

### Luminous Intensity Distribution Curve

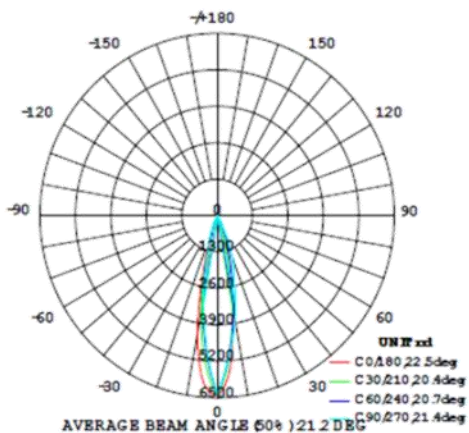

|                     |               |
|---------------------|---------------|
| Code                | LC198         |
| Input Voltage       | DC 24V        |
| Power(Watts)        | 3W (3*1W)     |
| Lumen               | 270lm         |
| Light Source        | Osram LED     |
| Color Temperature   | 3000K         |
| CRI ≥               | 90            |
| IP level            | IP20          |
| Main Material       | Aluminum      |
| Body Color          | Black         |
| Wire connection way | Track Adaptor |
| Class               | □I □II        |

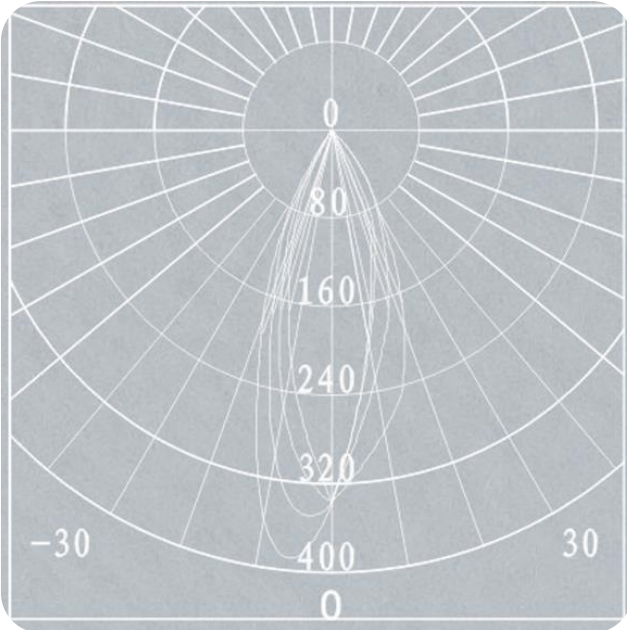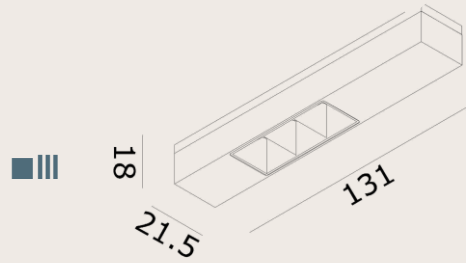


|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Code                | LC155                                                                                          |
| Input Voltage       | DC 24V                                                                                         |
| Power(Watts)        | 12W                                                                                            |
| Lumen               | 1380lm                                                                                         |
| Light Source        | LUMILEDS LED                                                                                   |
| Color Temperature   | 3000K                                                                                          |
| CRI ≥               | 90                                                                                             |
| IP level            | IP20                                                                                           |
| Main Material       | Aluminum                                                                                       |
| Body Color          | Black                                                                                          |
| Wire connection way | Track Adaptor                                                                                  |
| Class               | <input type="checkbox"/> I <input type="checkbox"/> II <input checked="" type="checkbox"/> III |



## Optic Data

### Luminous Intensity Distribution Curve

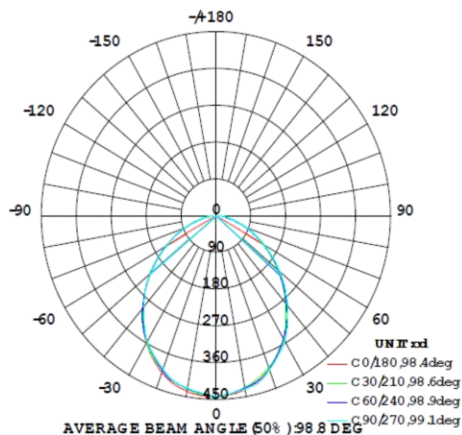





نوران  
NOORAN