






نوران

NOORAN

RECESSED CEILING DATASHEET

SEP - 2025

Recessed Light







3000K
100%

NOORAN



Code	N1001
Base	GU10
Cut Out	68 mm
Main Material	Aluminum
Body Color	Black / White

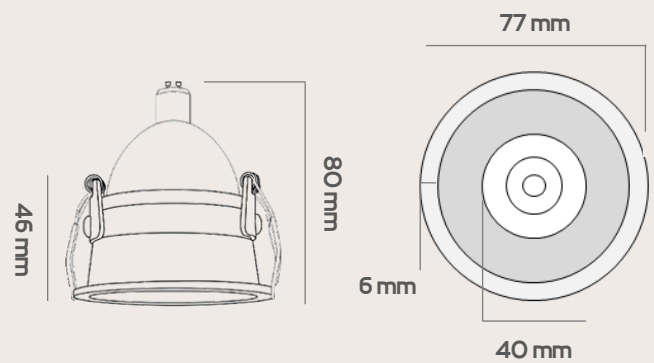




Code	N1002
Base	GU10
Cut Out	80 mm
Main Material	Aluminum
Reflector Color	Black / White / Gold
Body Color	White

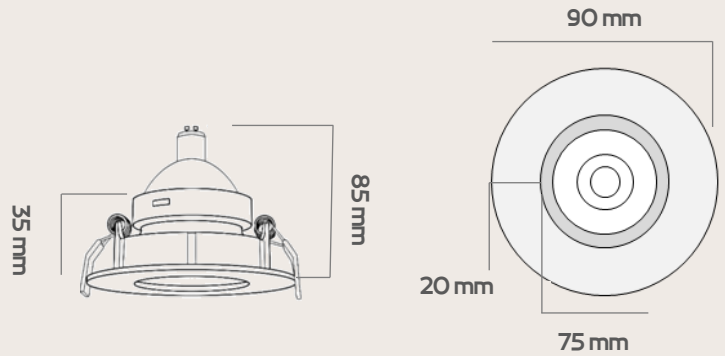




Code	N1003
Base	GU10
Cut Out	80 mm
Main Material	Aluminum
Body Color	Black / White

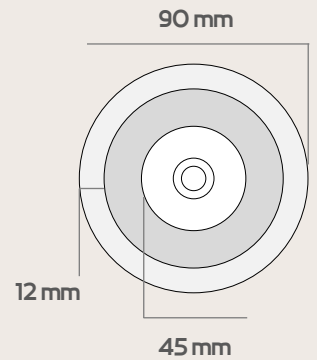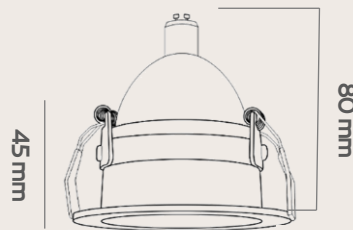


Code	N1024
Cut Out	68 mm
Input Voltage	220V
Power(Watts)	12W
Lumen	1100lm
Light Source	Philips
Beam Angle	15° , 30° , 50°
Color Temperature	3000K , 4000K , 5700K
CRI $\geq$	90
IP Level	20
Main Material	Aluminum
Body Color	Black / White

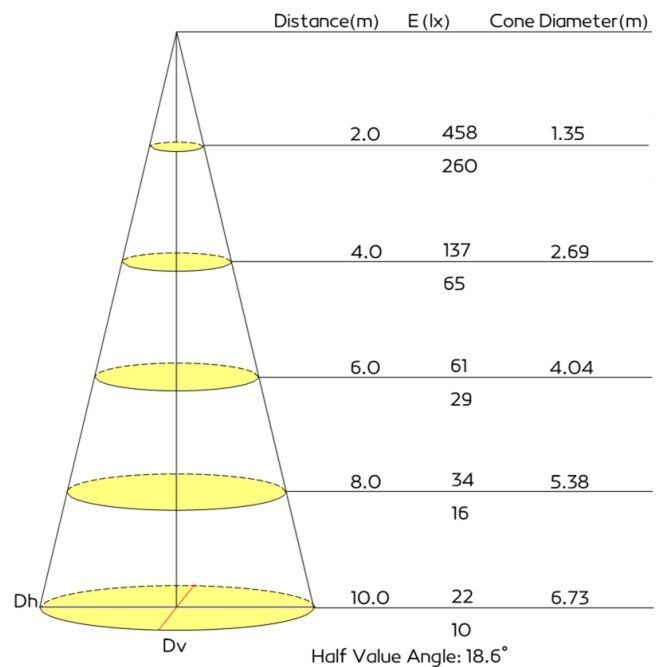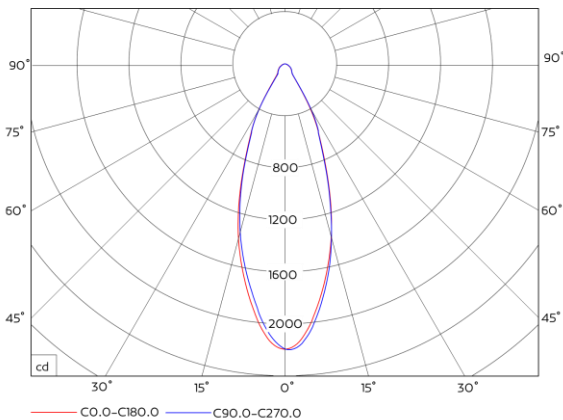
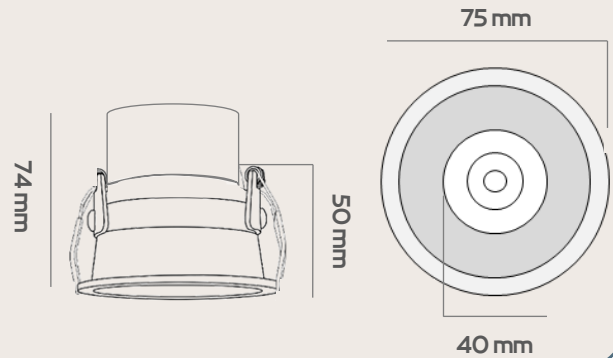


Code	N1025
Cut Out	80 mm
Input Voltage	220V
Power(Watts)	12W
Lumen	1100lm
Light Source	Philips
Beam Angle	15° , 30° , 50°
Color Temperature	3000K , 4000K , 5700K
CRI $\geq$	90
IP Level	20
Main Material	Aluminum
Body Color	Black / White

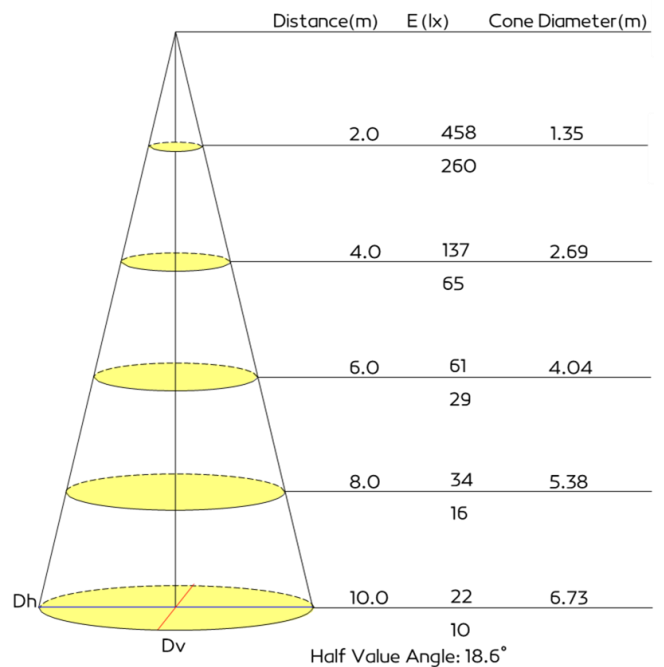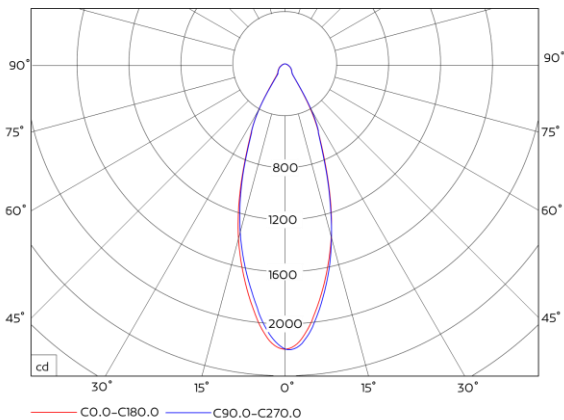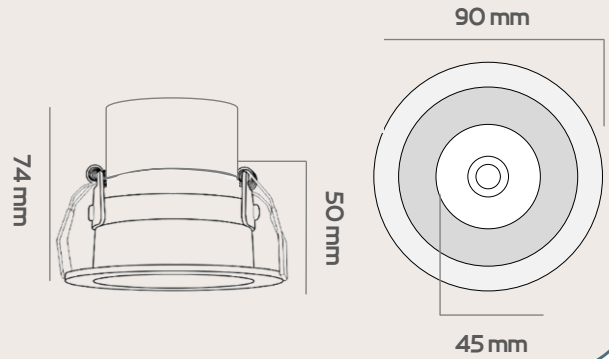


Code	N1019
Cut Out	60 mm
Input Voltage	220V
Power(Watts)	12W
Lumen	1100lm
Light Source	Philips
Beam Angle	15° . 30° . 50°
Color Temperature	3000K . 4000K . 5700K
CRI ≥	90
IP Level	20
Main Material	Aluminum . Polycarbonate
Body Color	Black / White / Gold

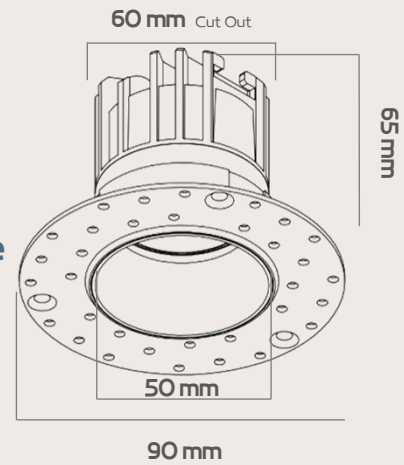


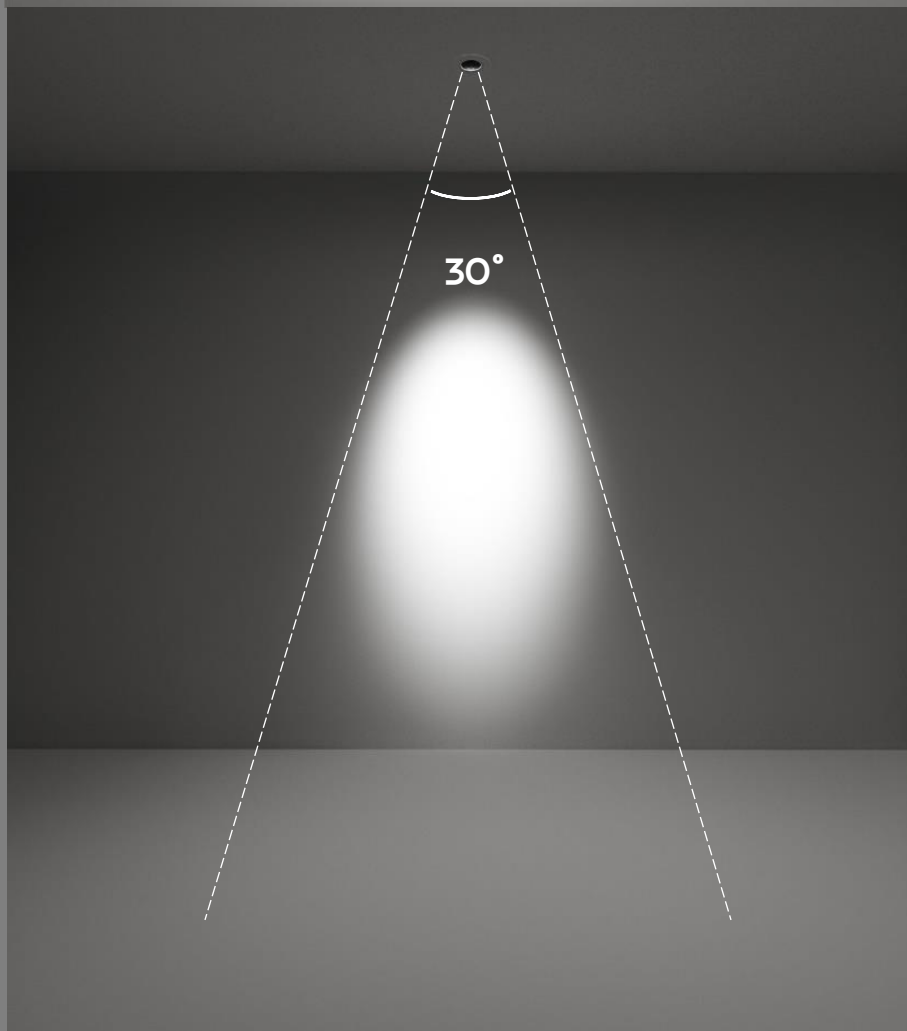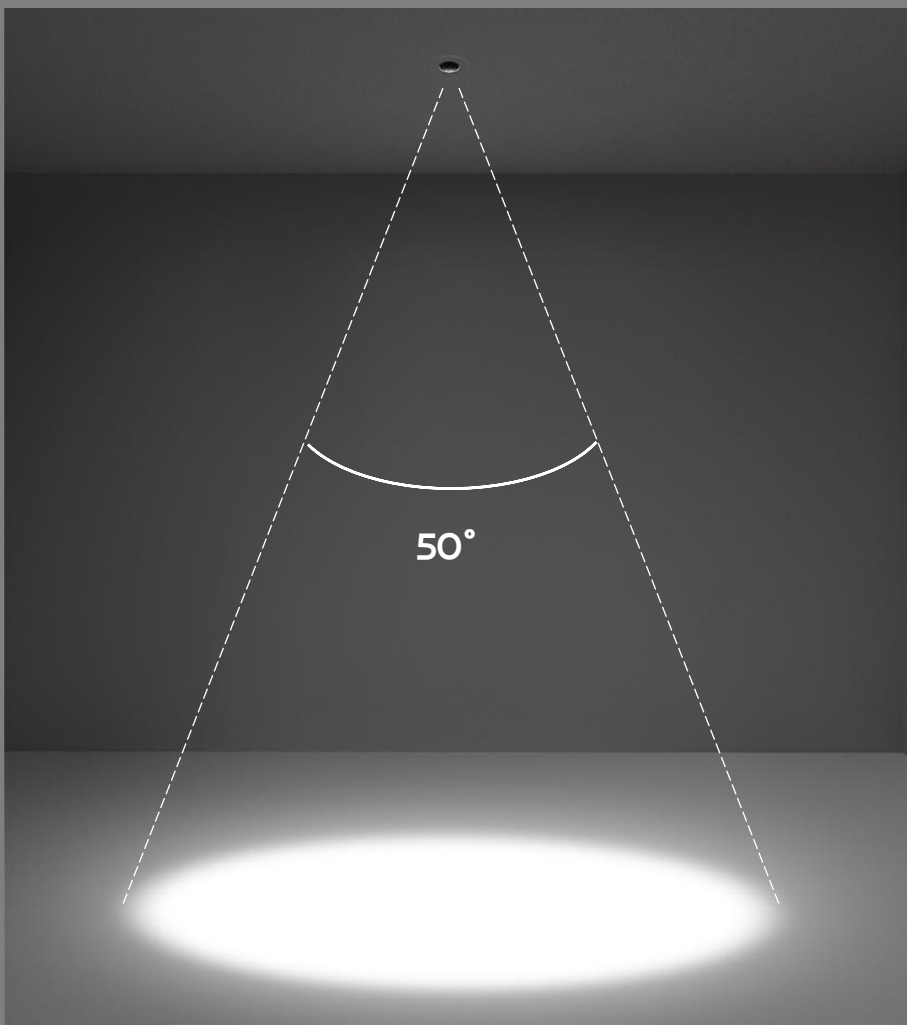

Code	N1021-R / N1021-S
Cut Out	55mm
Input Voltage	220 V
Power(Watts)	12W
Lumen	1100lm
Light Source	Philips
Beam Angle	15° . 30° . 50°
Color Temperature	3000K . 4000K . 5700K
CRI ≥	90
IP Level	20
Main Material	Aluminum
Body Color	White / Black / Gold



68 mm



59 mm

67 mm


Square Body Form



Round Body Form



Code	N1020
Cut Out	45 mm
Power(Watts)	8W
Lumen	528.5lm
Light Source	CREE COB 1306C
Beam Angle	30°
Color Temperature	2700K
CRI $\geq$	90
IP Level	20
Main Material	Aluminum
Reflector Color	Matt & Shining Black / Gold
Body Color	Black / White

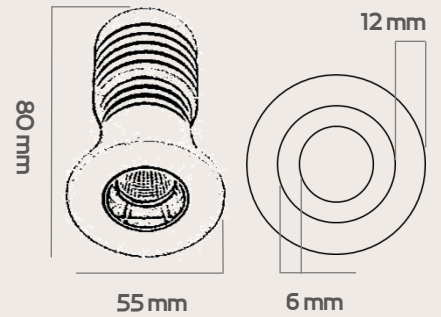



Shining Black




Matt Black






Shining Gold

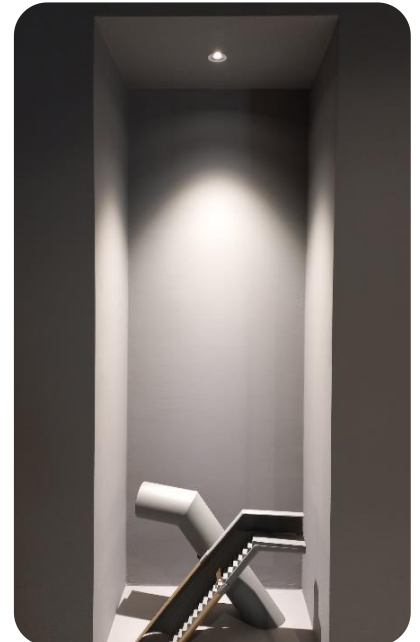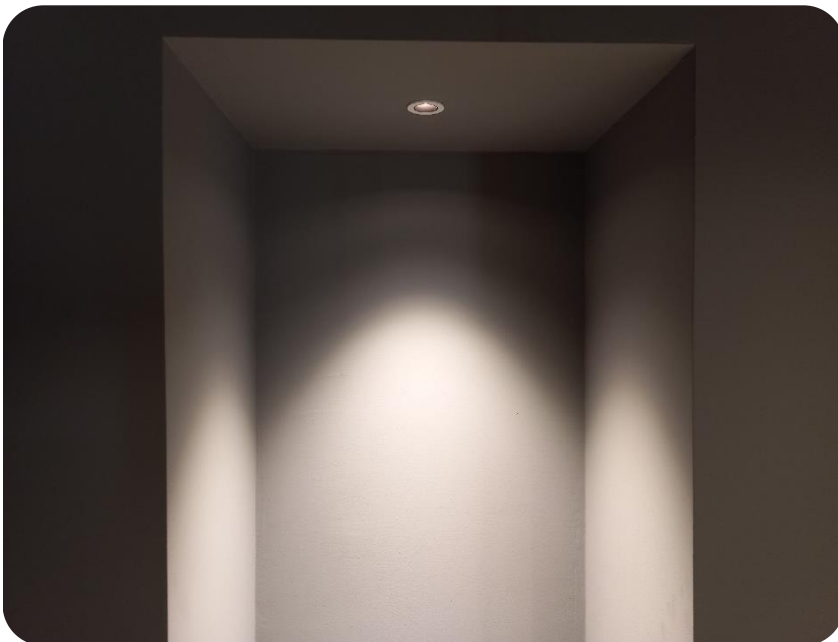


Code	LC219
Light source	TEEN LED
Power(Watts)	7W
Cut out	Ø 50 mm
Lumen	408lm
Color Temperature	3000K
Beam Angle	40°
CRI ≥	90
IP Level	20
Main Material	Aluminum
Body Color	Matt White

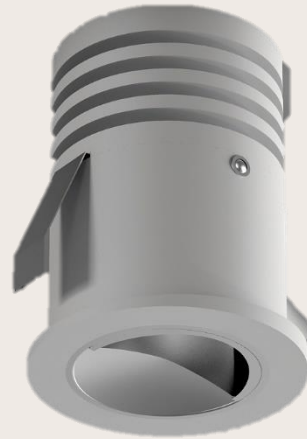



Code	T360
Cut Out	Ø100 mm
Output Voltage	7-18 700MA
Power(Watts)	2x4W (8W)
Lumen	522.4lm
Lamp Holder	Ceramic PCB
Light Source	CREE XPG-2
Beam Angle	85.4°
Color Temperature	3000K . 4000K
CRI ≥	80
IP Level	20
Main Material	Aluminum
Body Color	White
Certificate	CE ROHS

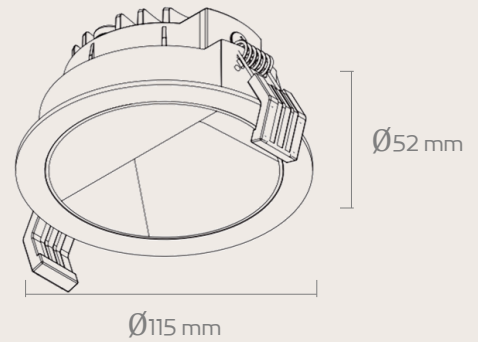


Code	E155
Cut Out	Ø175 mm
Power(Watts)	18W
Lumen	1620lm
Color Temperature	3000K
IP Level	20
Body Color	White

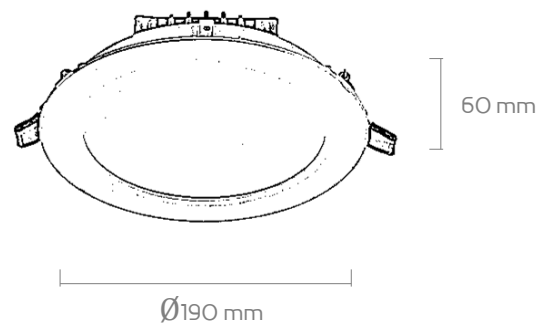


Code	N1022-COB
Cut Out	95x95 mm
Input Voltage	220
Light Source	Philips COB
Power(Watts)	12W
Lumen	1100lm
Beam Angle	15° . 30° . 50°
IP Level	20
Color Temperature	3000K . 4000K . 5700K
CRI $\geq$	90
Main Material	Aluminum
Body Color	Black / White

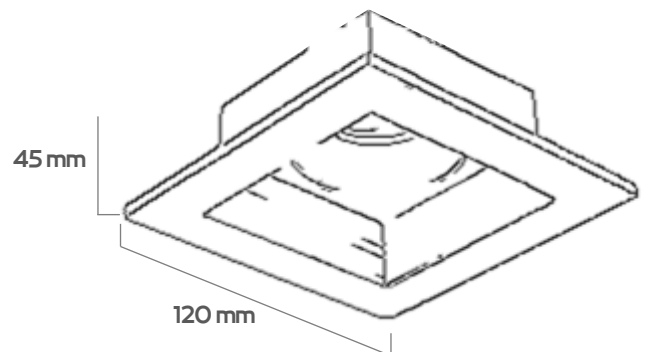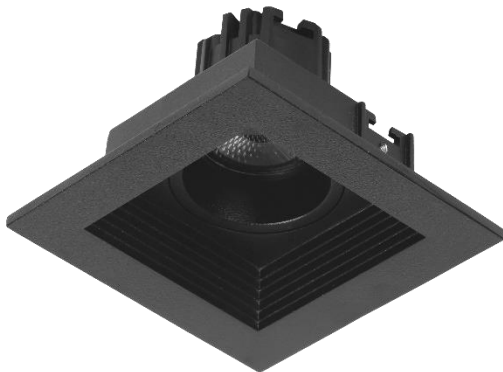


Code	N1022-GU10
Cut Out	95x95 mm
Input Voltage	220
Light Source	GU10
Power(Watts)	6W
Lumen	550lm
Beam Angle	35°
IP Level	20
Color Temperature	3000K
CRI $\geq$	80
Main Material	Aluminum
Body Color	Black / White

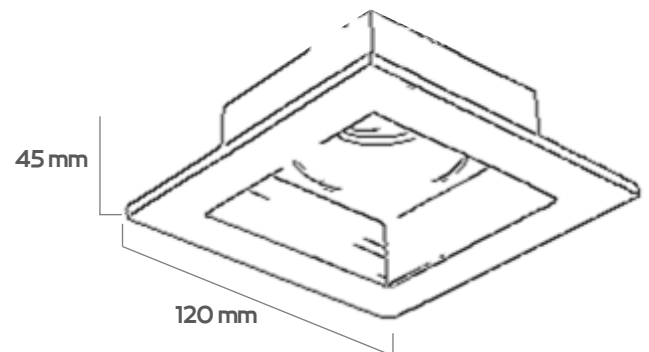



Code	N1023-COB
Cut Out	95x200 mm
Input Voltage	220
Light Source	Philips COB
Power(Watts)	2*12W (24W)
Lumen	2*1100lm (2200lm)
Beam Angle	15° . 30° . 50°
IP Level	20
Color Temperature	3000K . 4000K . 5700K
CRI ≥	90
Main Material	Aluminum
Body Color	Black / White

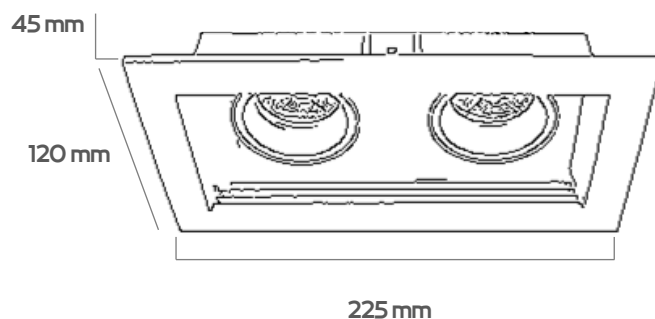



Code	N1023-GU10
Cut Out	95x200 mm
Input Voltage	220
Light Source	GU10
Power(Watts)	2*6W (12W)
Lumen	2*550lm (1100lm)
Beam Angle	35°
IP Level	20
Color Temperature	3000K
CRI $\geq$	80
Main Material	Aluminum
Body Color	Black / White

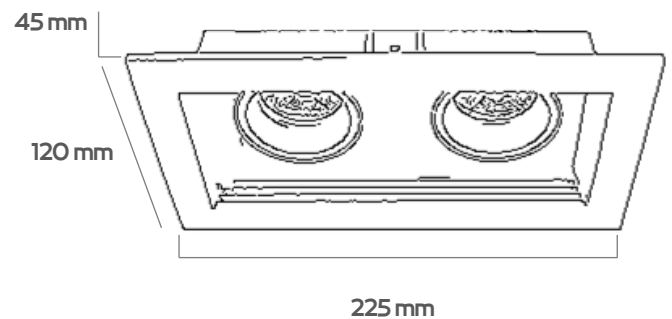

Code	N1016
Cut Out	40x140 mm
Input Voltage	190-265 120MA
Power(Watts)	5x2.5W (11.7W)
Lumen	1016lm . 1010lm
Lamp Holder	Aluminum
Light Source	Nichia Chips
Beam Angle	40°
Color Temperature	3000K . 4000K
CRI ≥	95
IP Level	44
Main Material	Aluminum
Body Color	Black / White
Dimmable	Optional

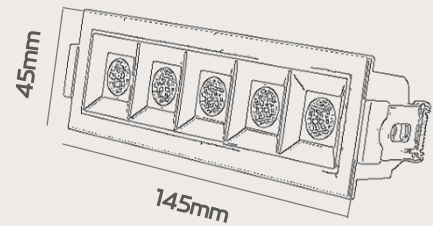

Code	N1017
Cut Out	40x275 mm
Input Voltage	190-265 120MA
Power(Watts)	10x2.5W (25W)
Lumen	1935m , 1925lm
Lamp Holder	Aluminum
Light Source	Nichia Chips
Beam Angle	40°
Color Temperature	3000K . 4000K
CRI ≥	95
IP Level	44
Main Material	Aluminum
Body Color	Black / White
Dimmable	Optional

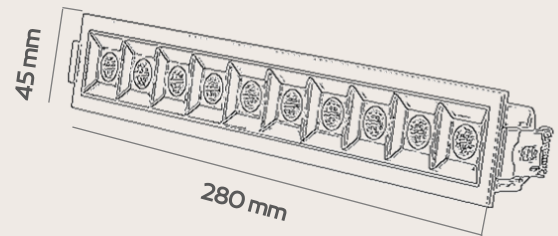

Code T364 (WHT) / T365 (BLK)

Cut Out 38 mm

Power(Watts) 2.1W

Input Voltage 700mA

Lumen 128lm

Light Source CREE XPE-2

Beam Angle 30°

Color Temperature 3000K

CRI $\geq$ 90


IP Level 20

Main Material Aluminum

Body Color White / Black



 38(Cut out)



Code T361 (WHT) / T363 (BLK)

Cut Out 46 mm

Power(Watts) 7W

Input Voltage 700mA

Lumen 657lm

Light Source CREE CMB1304

Beam Angle 36°

Color Temperature 3000K

CRI ≥ 85



IP Level 20

Main Material Aluminum

Body Color White / Black



 46(Cut out)



Code T366 (WHT) / T367 (BLK)

Cut Out 55 mm

Power(Watts) 12.7W

Input Voltage 350mA

Lumen 1425lm

Light Source CREE CMB1510

Beam Angle 30°

Color Temperature 3000K

CRI ≥ 90

IP Level 20


Main Material Aluminum

Body Color White / Black



Dimmable Optional



 55(Cut out)



Code	T362
Cut Out	55 mm
Power(Watts)	18W
Input Voltage	350mA
Lumen	1468lm
Light Source	CREE CXB 1512
Beam Angle	30°
Color Temperature	3000K
CRI $\geq$	90
IP Level	20
Main Material	Aluminum
Body Color	White

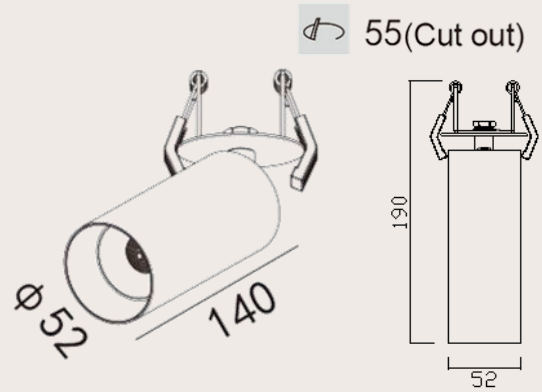



نوران
NOORAN